

# Multi- Aperture cores (2861010002)

Part Number: 2861010002

67 MULTI- APERTURE CORE

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- - Last digit 2 = Burnished

**Multi- aperture cores are used in suppression applications and in balun (balance- unbalance) and other broadband transformers. They are also employed in airbag designs to prevent accidental activation.**

- All multi- aperture cores are supplied burnished.
- Our “Multi- Aperture Core Kit” (part number 0199000036) is available for prototype evaluation.

**For any multi- aperture requirement not listed here, feel free to contact our customer service group for availability and pricing.**

Weight: 46 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	30.2	±0.60	1.19	-
B	28.7	±0.70	1.13	-
C	15	±0.40	0.59	-
E	14.6	±0.40	0.575	-
H	6.8	±0.2	0.268	-

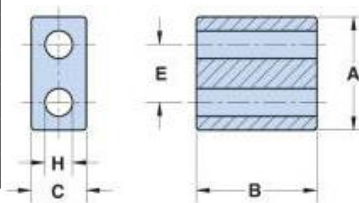


Figure 3

**Chart Legend**

+ Test frequency


Typical Impedance (Ω)	
100 MHz	510
250 MHz <sup>+</sup>	625

Electrical Properties	
A <sub>L</sub> (nH)	800 Min

Multi- aperture cores in 73 and 43 materials are controlled for impedance only. The 61 NiZn material is controlled for both impedance and A<sub>L</sub> value. The high frequency 67 material is controlled for A<sub>L</sub> value. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

- Multi- aperture cores in 73 and 43 material are measured for impedance on the 4193A Vector Impedance Analyzer. The 61 and 67 multi- aperture cores are tested on the 4291A Impedance Analyzer. All impedance measurements are performed with a single turn to both holes, using the shortest practical wire length.
- The 61 and 67 material multi- hole beads are tested for A<sub>L</sub> value. The test frequency is 10 kHz at < 10 gauss. The test winding is five turns wound through both holes.

2861010002

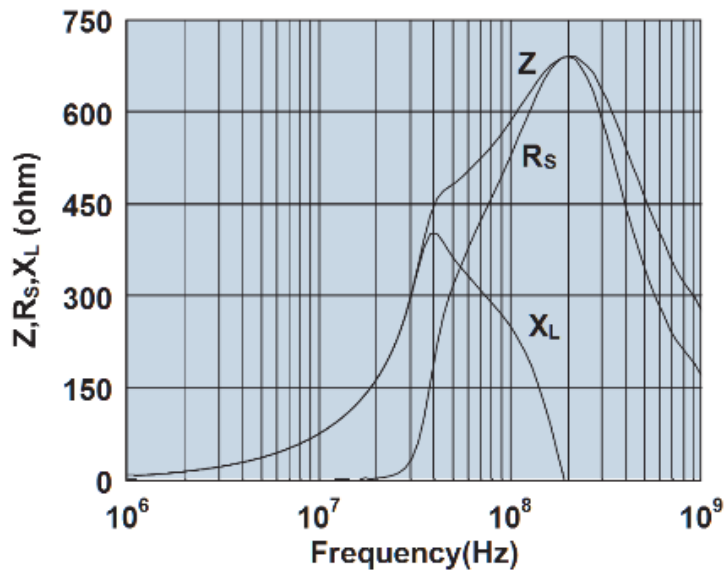

Impedance, reactance, and resistance vs. frequency.