

## MAX20335 Evaluation Kit

Evaluates: MAX20335

### General Description

The MAX20335 evaluation kit (EV kit) is a fully assembled and tested circuit for evaluating the MAX20335 wearable charge-management solution with I<sup>2</sup>C capability for low-power wearable application. The device includes a linear battery charger, smart power selector, two ultra-low quiescent current buck regulators, and three low-dropout (LDO) linear regulators.

Refer to the MAX20335 IC data sheet for detailed information regarding the operation and features of the devices.

### Features

- RoHS Compliant
- Proven PCB Layout
- Full Assembled and Tested
- I<sup>2</sup>C Serial Interface

### Detailed Description of Hardware

The MAX20335 evaluation kit (EV Kit) evaluates the MAX20335 wearable charge-management solution.

See [Table 1](#) thru [Table 3](#) for pin descriptions of the three connectors (J1–J3).

[Ordering Information](#) appears at end of data sheet.

**Table 1. Connector J1**

PIN	MAX20335	DESCRIPTION
1	GND	Ground
2	MON	Voltage Monitor Output
3	N.C.	Not Connected
4	INT	Open-drain Active-low Interrupt Output
5	RST	Power-On Reset Output.
6	SDA	I <sup>2</sup> C Serial Data Input / Output
7	SCL	I <sup>2</sup> C Serial Clock Input
8	MPC1	Multipurpose Configuration Input 1
9	MPC0	Multipurpose Configuration Input 0
10	PFN2	Power Function Control Input / Output
11	PFN1	Power Function Control Input
12	GND	Ground

**Table 2. Connector J2**

PIN	SIGNAL	DESCRIPTION
1	L3IN	LDO3 Input
2	L3OUT	LDO3 Output
3	L2OUT	LDO2 Output
4	L1OUT	LDO1 Output
5	B2OUT	Buck Regulator 2 Output
6	B1OUT	Buck Regulator 1 Output
7	L2IN	LDO2 Input
8	L1IN	LDO1 Input

**Table 3. Connector J3**

PIN	SIGNAL	DESCRIPTION
1	GND	Ground
2	CHRGIN	Charger Input
3	SYS	System Load Connection
4	BAT	Battery
5	THM	Battery Temperature Thermistor Connection
6	CAP	Bypass for Internal LDO
7	SET	External Resistor Connection for Configuring Battery Charge Current
8	LED	LED Current Sink Input
9	N.C.	Not Connected
10	N.C.	Not Connected
11	N.C.	Not Connected
12	GND	Ground

**Component Suppliers**


SUPPLIER	WEBSITE
Murata Americas	<a href="http://www.murata.com">www.murata.com</a>
TDK Corp	<a href="http://www.component.tdk.com">www.component.tdk.com</a>

**Note:** Indicate that you are using the MAX20335 when contacting these component suppliers.


## MAX20335 EV System Bill of Materials

ITEM	REF_DES	DNI/DNP	QTY	MFG PART #	MANUFACTURER	VALUE	DESCRIPTION
1	C1-C9	-	9	C1005X5R1V225M050BC	TDK	2.2UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 2.2UF; 35V; TOL=20%; MODEL=C SERIES; TG=-55 DEGC TO +85 DEGC; TC=X5R
2	C10-C12	-	3	C1608X5R0J226M080AC	TDK	22UF	CAPACITOR; SMT (0603); CERAMIC CHIP; 22UF; 6.3V; TOL=20%; MODEL=C SERIES; TG=-55 DEGC TO +85 DEGC; TC=X5R
3	J1, J3	-	2	PBC12SAAN	SULLINS ELECTRONICS CORP.	PBC12SAAN	CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 12PINS; -65 DEGC TO +125 DEGC
4	J2	-	1	PBC08SAAN	SULLINS ELECTRONICS CORP.	PBC08SAAN	CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 8PINS; -65 DEGC TO +125 DEGC
5	L1, L2	-	2	DFE201610E-2R2M	TOKO	2.2UH	INDUCTOR; SMT (2016); METAL ALLOY CHIP; 2.2UH; TOL=+/-20%; 2.6A
6	R3	-	1	ERA-2AED221	PANASONIC	220	RESISTOR; 0402; 220 OHM; 0.5%; 25PPM; 0.063W; THIN FILM
7	U1	-	1	MAX20335	MAXIM	MAX20335	EVKIT PART - IC; PWRM; WEARABLE CHARGE MANAGEMENT SOLUTION; WLP36;
8	PCB	-	1	MAX	MAXIM	PCB	PCB:MAX
9	Q1	DNP	0	SI8439DB-T1-E1	VISHAY SILICONIX	SI8439DB-T1-E1	TRAN; P-CHANNEL 8V (D-S) MOSFET; PCH; SMT; PD-(2.7W); I(-9.2A); V(-8V)
10	R1, R2	DNP	0	RG1005P-102-D	SUSUMU CO LTD.	1K	RESISTOR; 0402; 1K OHM; 0.5%; 25PPM; 0.0625W; THIN FILM
TOTAL			20				


MAX20335 EV System Schematic

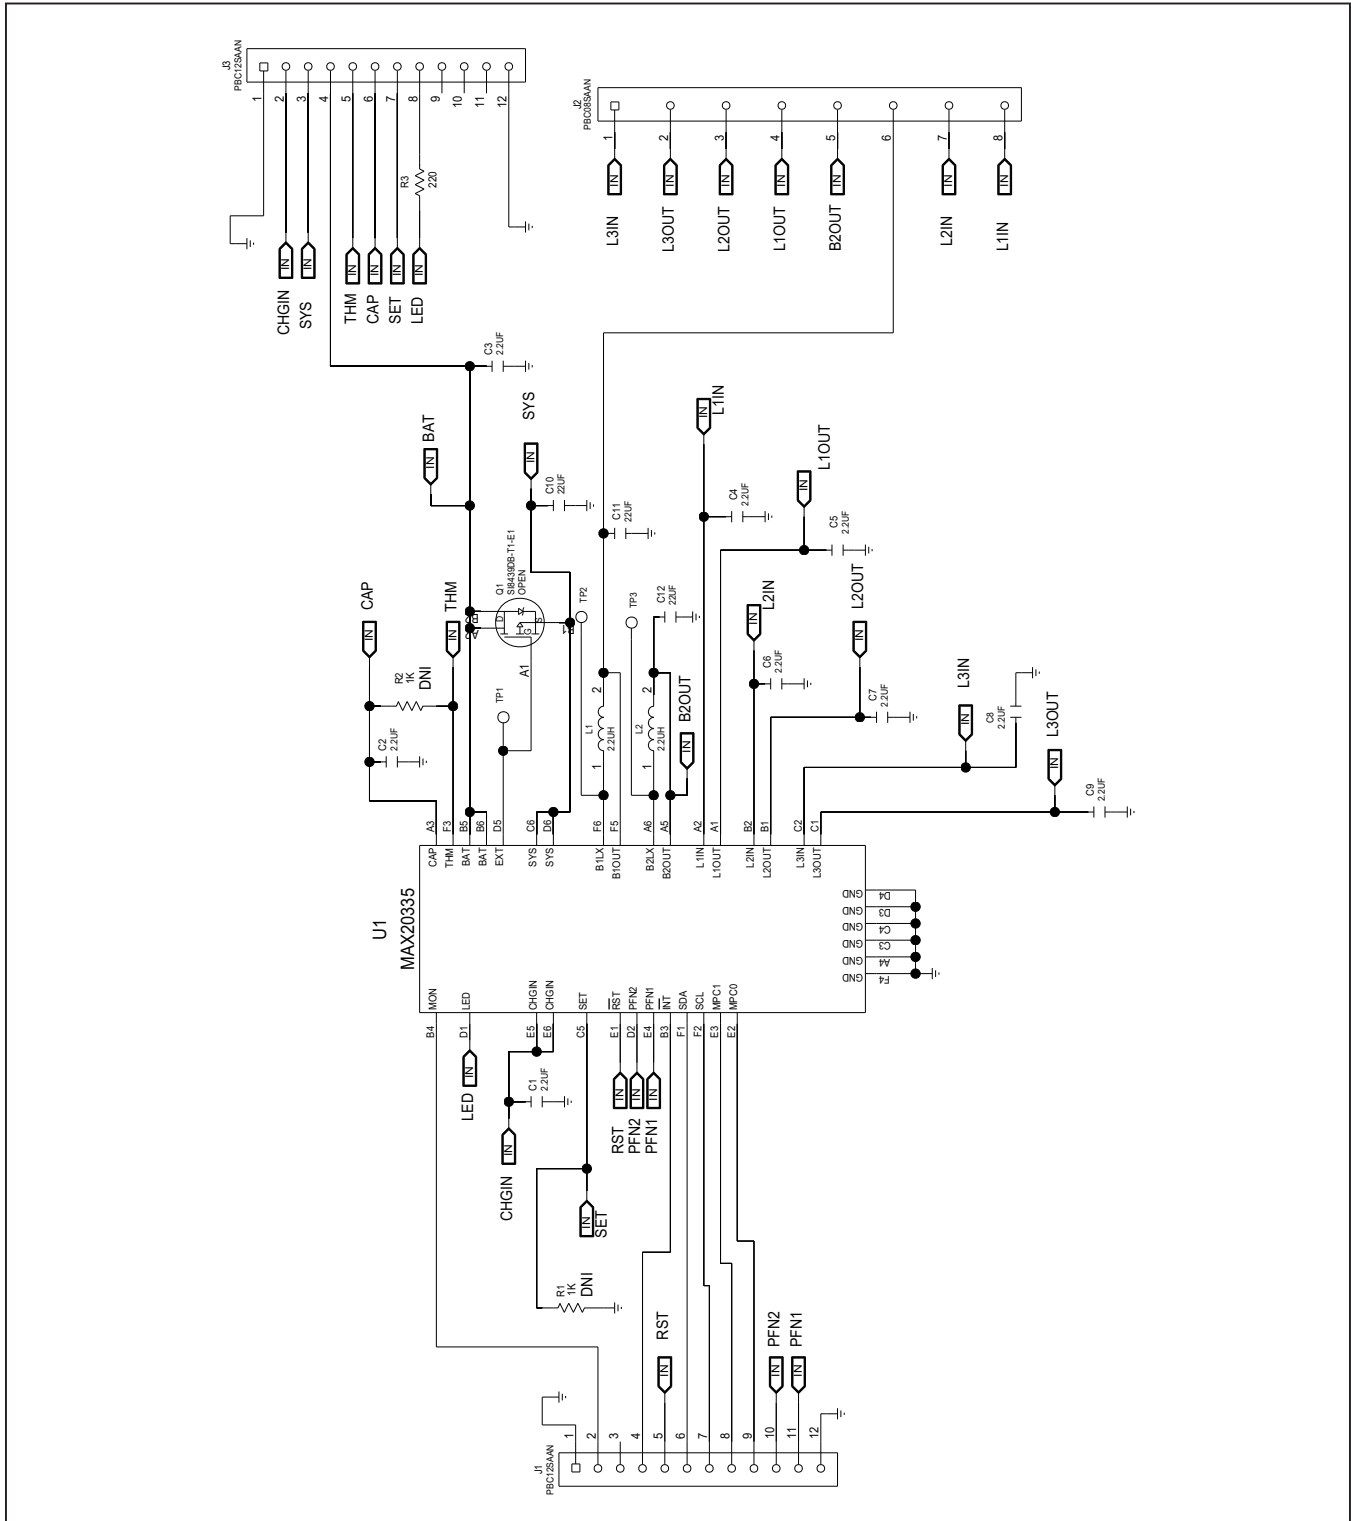


MAX20335 EV System PCB Layout

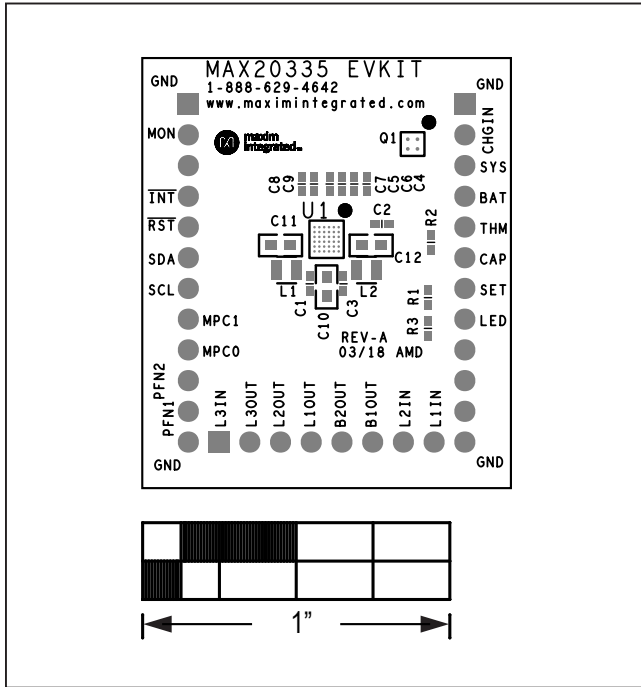

MAX20335 EV Kit—Top Silkscreen

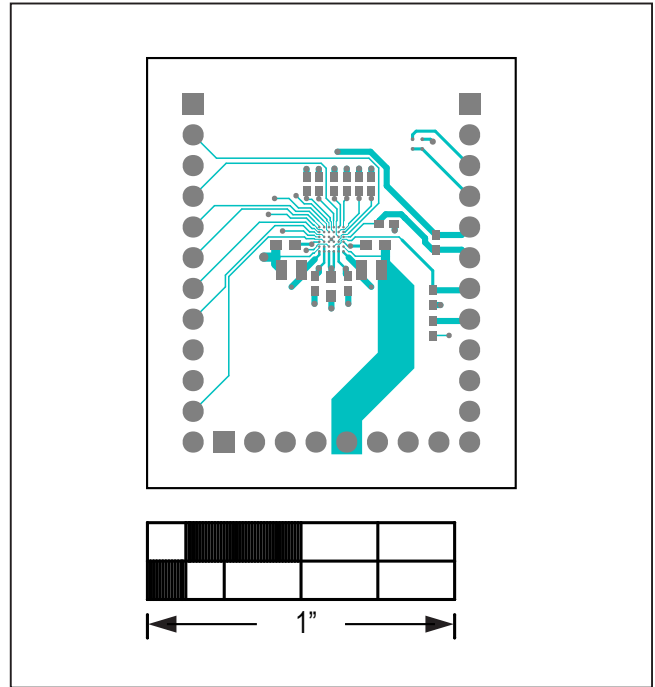


MAX20335 EV Kit—Top

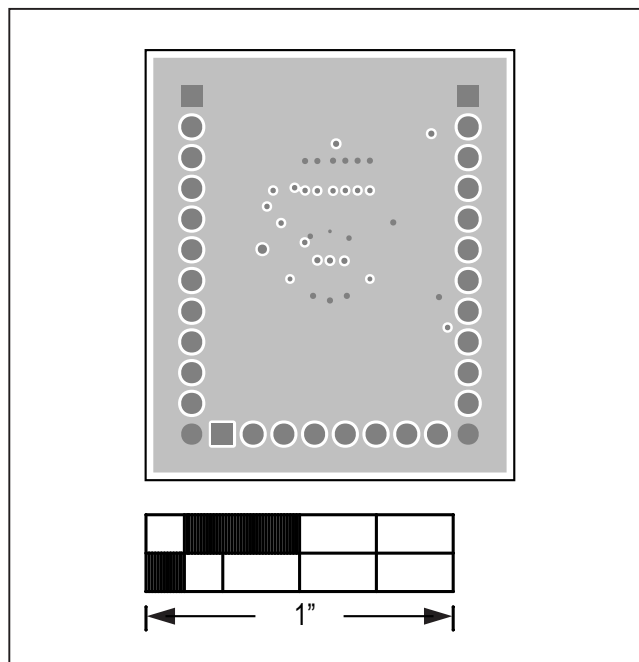


MAX20335 EV Kit—Layer 2


**MAX20335 EV System PCB Layout (continued)**

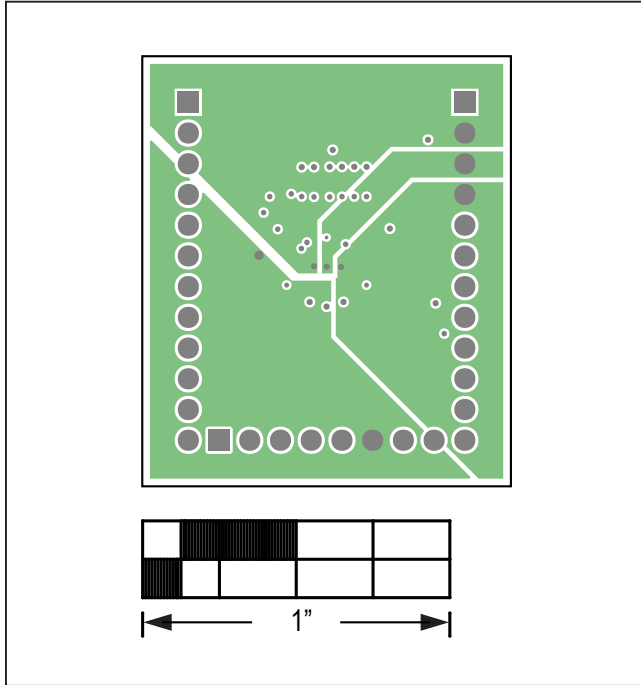

MAX20335 EV Kit—Layer 3

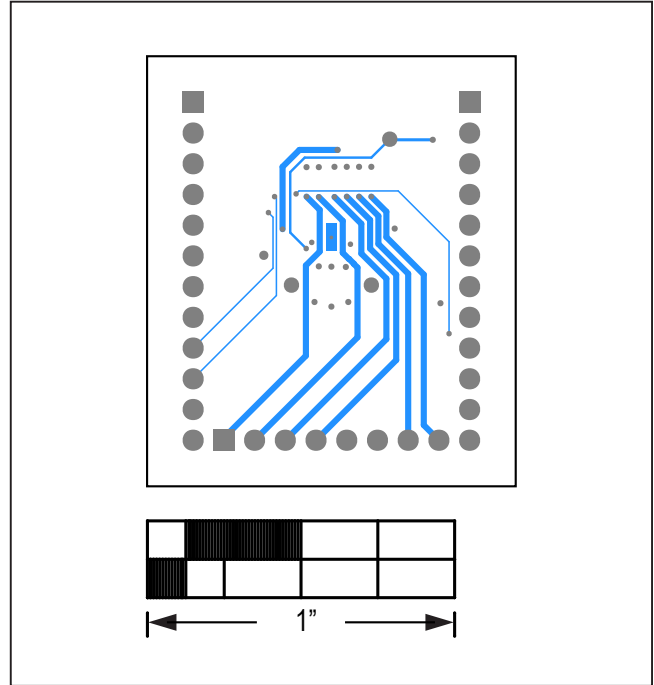

MAX20335 EV Kit—Bottom

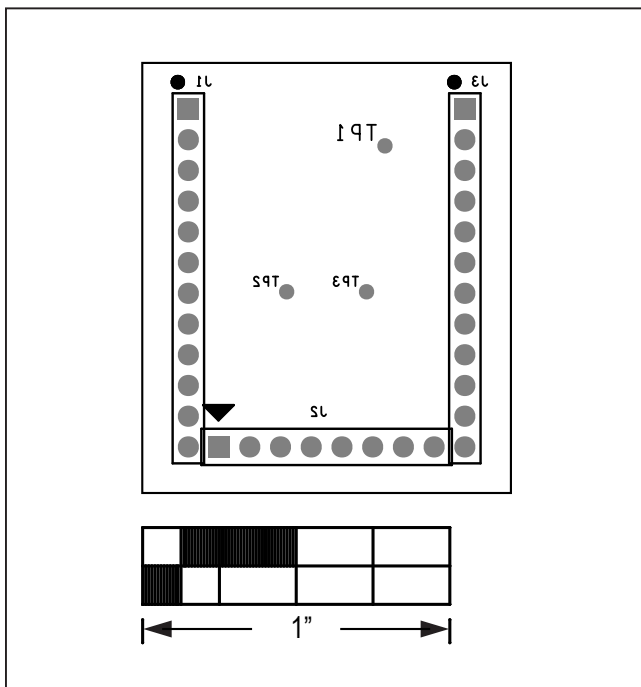

MAX20335 EV Kit—Bottom Silkscreen

**Ordering Information**

PART	TYPE
MAX20335EVKIT#	EV Kit

#Denotes RoHS compliant.

### Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	4/18	Initial release	—

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.*