




UNIT:MM

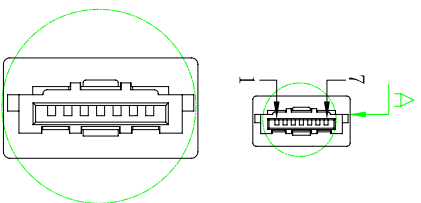


SECTION A-A
SCALE 2:1

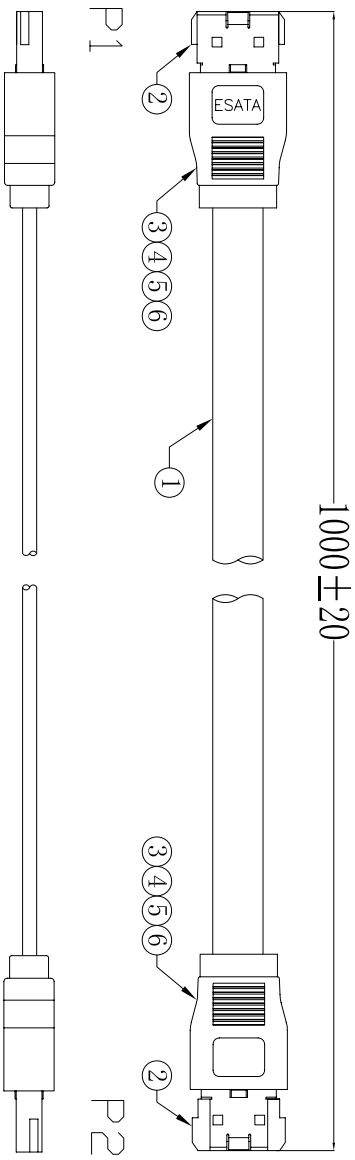

ELECTRICAL TEST:
1.100% OPEN SHORT & MISWIRE TEST.
2.CONDUCTIVE RESISTANCE:1 ohm MAX.
3.INSULATION RESISTANCE:10M OHM/MIN
4.HI-PAT TEST DC 300V

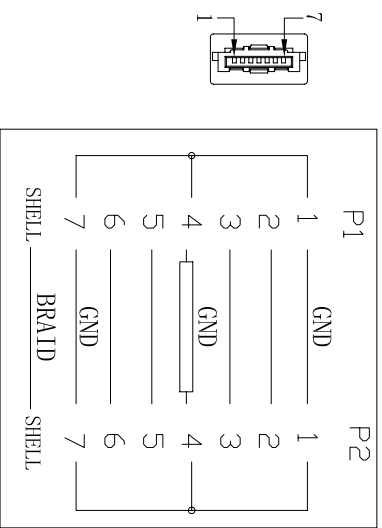

PIN ASSIGNMENT:

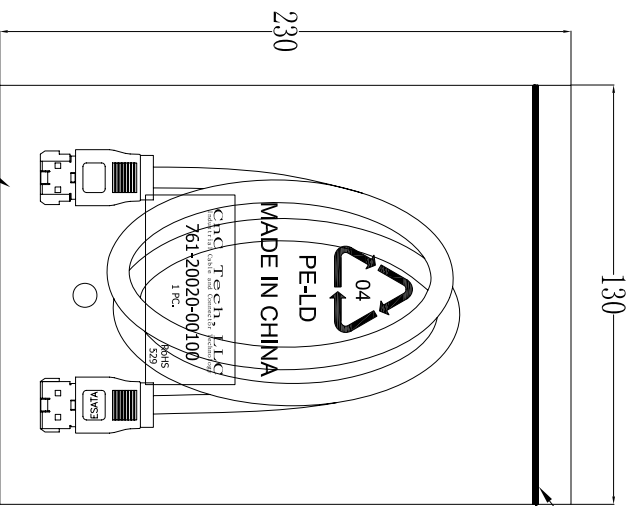

⑧	PE BAG	1/10	CLEAR SIZE: 280*330*90.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"及产周期, 有透气孔
⑦	PE BAG	1	CLEAR SIZE: 130*230*90.05mm PRINT BLACK"MADE IN CHINA"+"1PCS"及产周期, 有透气孔
⑥	OUT JACKET	12g	PVC 45P COLOR BLACK
⑤	COPPER FOIL	2	DOUBLE-SIDED CONDUCTIVE COPPER FOIL. W:0mm*H:30mm
④	ACETATE	2	ACETATE CLOTH TAPE W:10mm*H:40mm
③	TUBE	2	HEAT SHRINK TUBE BLACK ØD12mm L110mm
②	CONN	2	ESATA BOTTOM METAL SHELL PLATE NICKEL
		2	ESATA TOP METAL SHELL PLATE NICKEL
①	CABLE	2	ESATA 7P/F CRIMP TYPE PIN:G/F INSULATOR:BLACK
		2	ESATA 7P/F CRIMP TYPE PIN:G/F INSULATOR:BLACK
①	CABLE	1	UL2725 [26AWG(1/0.404)*2F INS:HD-PE+D/W(1/0.32)*2C+AL/MV]*2F INNER JACKET PVC ØD2.1*7.3mm +BRAID(16/10/0.1)+PVC JACKET COLOR:BLACK ØD4.0*9.0MM L990±10mm.

CNC Tech, LLC
Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	761-20020-00100
DECIDE BY		DATE	2012-02-16
VERSIONS/EDITION	A/0	PROJECTION	