



ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

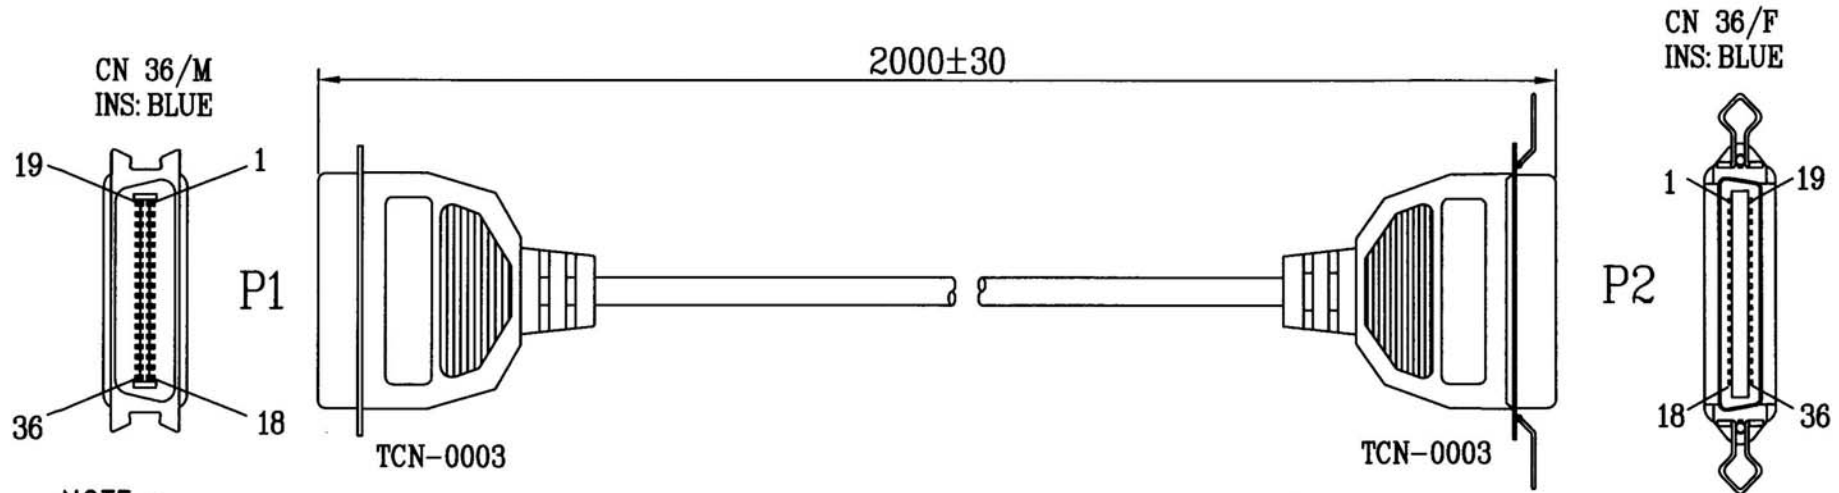

NOTE :

- 1.CABLE:NON-UL 28AWG(7/0.127)TCx36C INS:PVC+DRAIN WIRE+AL-FOIL/MYLAR
PVC JACKET COLOR:BEIGE(NK-A03) OD:ø9.0±0.2mm .
- 2.CONNECTOR:
P1:CN36P MALE GOLD FLASH CONTACT,NICKEL PLATED SHELL .
P2:CN36F FEMALE GOLD FLASH CONTACT,NICKEL PLATED SHELL .
- 3.HOOD:MOLDED TYPE, PVC 45P, COLOR:BEIGE(NK-A03).
- 4.ELECTRICAL REQUEST:100% OPEN SHORT MIS WIRE TEST.
CONTACT RESISTANCE 3 OHM MIN .
INSULATION RESISTANCE 10M OHM MIN .
- 5.PACKING:EACH PC / POLYBAG.

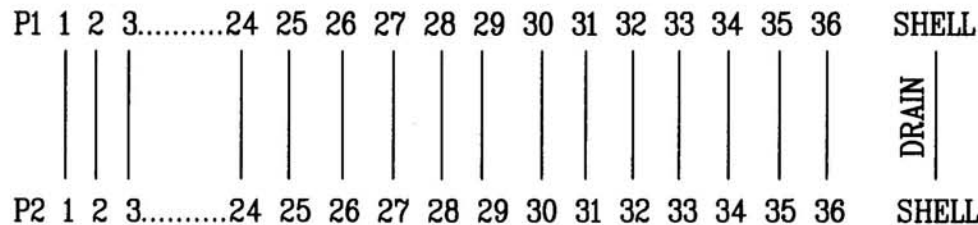

ASSMANN
Electronics, Inc.

AK140-2-R
CENTRONIC EXTENSION CABLE