


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
H	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		ECR-15-010046	13JUL15	SW	RZ

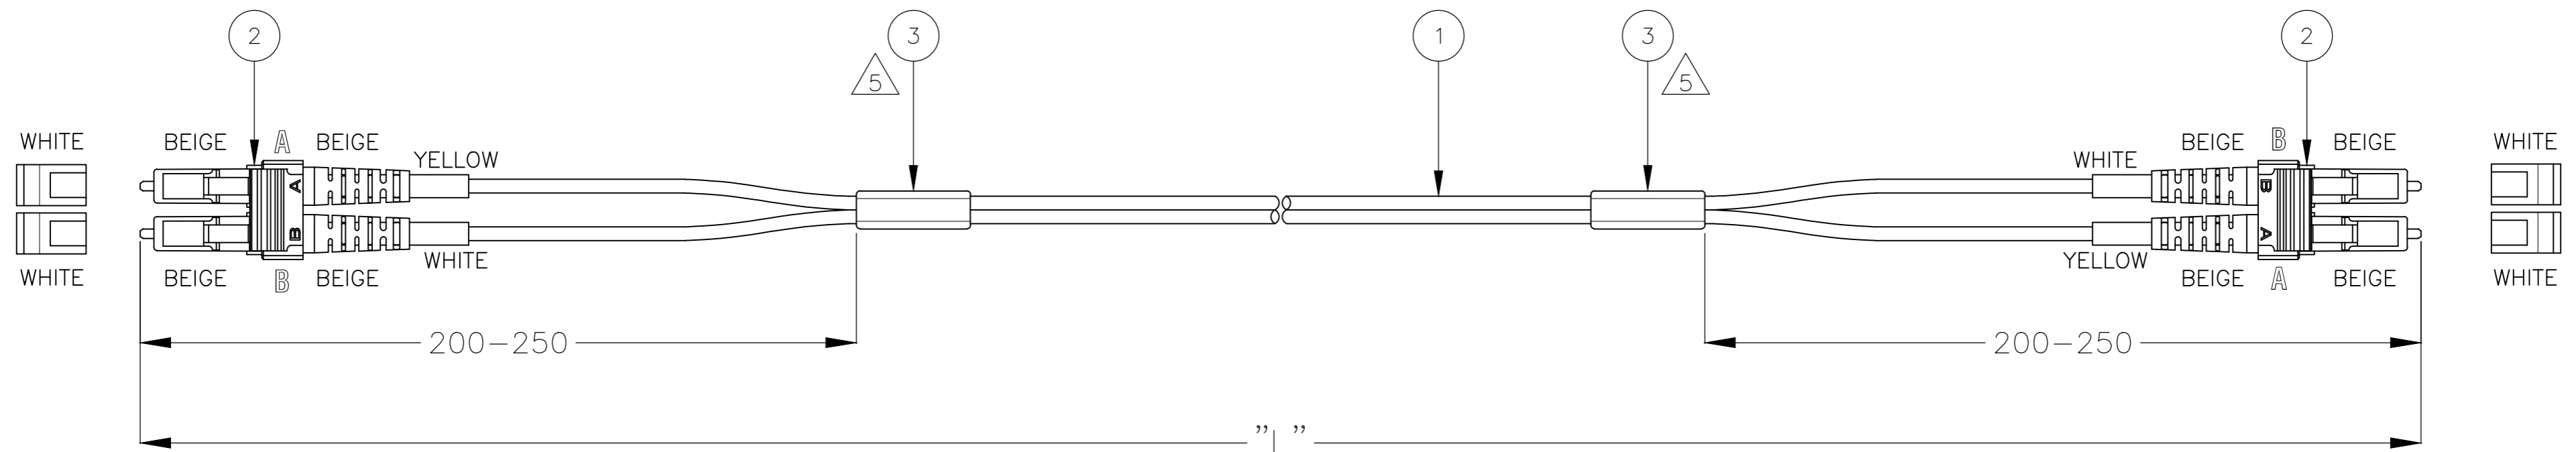

ASSEMBLY CONNECTIVITY	
LC CONN.	LC CONN.
YELLOW (A)	WHITE (B)
WHITE (B)	YELLOW (A)

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (meter)
X-2061529-Y	XY.0

NOTES:

- 1 ATTENUATION ≤ 0.3 dB, MEASURED AT 850 nm ACCORDING TO I.E.C. 61300-3-4 INSERTION METHOD B
- 2 RETURN LOSS ≥ 20 dB, IN MATED CONDITION AGAINST REFERENCE CONNECTOR AT 850 nm
- 3 FILLED OUT TEST RESULT SHEET SUPPLIED WITH EACH INDIVIDUALLY PACKED ASSEMBLY
- 4 CABLE INFORMATION:
 - CORE DIAMETER: 50/125 μ m (2x)
 - OUTER JACKET DIAMETER: 1.8 x 3.6 mm
 - OUTER JACKET COLOUR: ORANGE
 - OUTER JACKET MATERIAL: LSZH
- 5 BLANK LABEL
ONLY ONE LABEL IN THE MIDDLE OF THE CABLE IS USED FOR LENGTHS < 0.6 METER

2	BLANK LABEL	3
2	LC DUPLEX CONNECTOR, ULTRA SHORT, MULTI MODE, BEIGE	2
L	FOCAB 1.8MZ 50/125, ORANGE, LSZH	1
Qty	Description	Item

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. COOLEN 13APR2011		FIBER OPTIC LEAD 1.8MZ LC/DPX - LC/DPX ULTRA SHORT MULTI MODE 50/125	
DIMENSIONS: mm		CHK R. GROENEVELD 01JUN2011		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. HENGELMOLEN 01JUN2011		PRODUCT SPEC	
0 PLC ± 1.0 1 PLC ± 0.5 2 PLC $\pm -$ 3 PLC $\pm -$ 4 PLC $\pm -$ ANGLES $\pm -$		APPLICATION SPEC		RESTRICTED TO	
MATERIAL	FINISH	WEIGHT	SIZE A2	CAGE CODE 00779	DRAWING NO C=2061529
CUSTOMER DRAWING			SCALE NTS	SHEET 1 of 1	REV B