


UNIT:mm

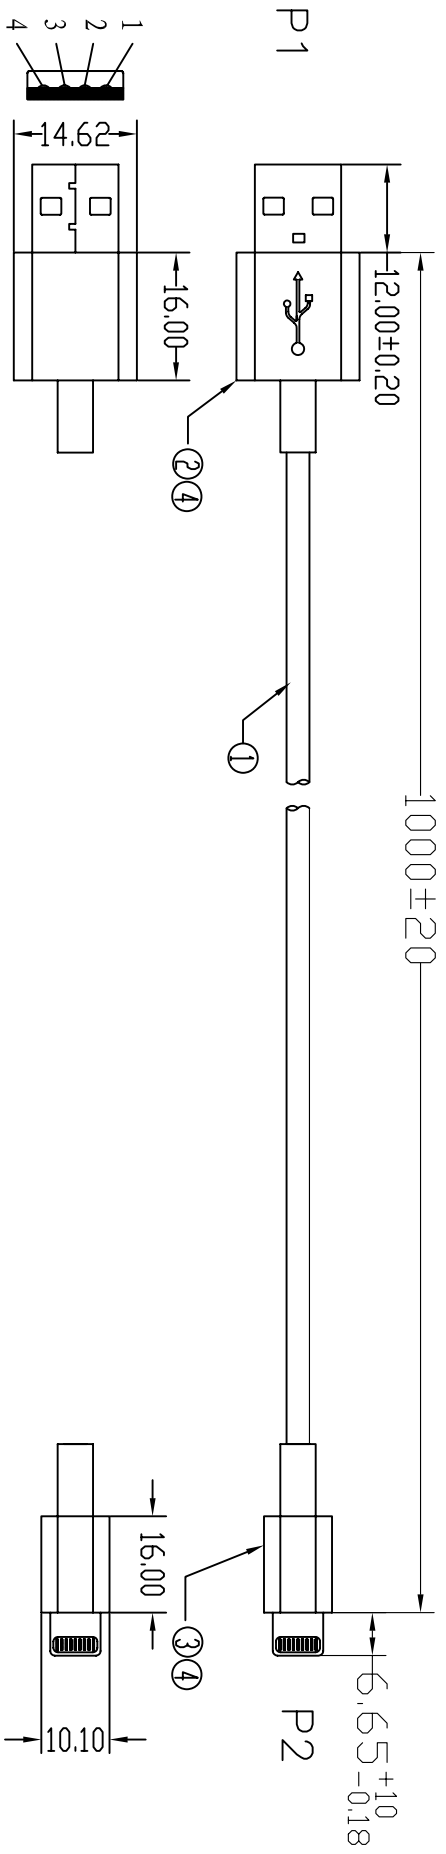

Technical requirements:

- 1 electrical testing requirements: 100% through 15 mobile phone test, data synchronization normal
- USB DC300V 20MΩ 0.1S no open circuit, short circuit, high pressure and other adverse
- 2 appearance: shell scratch, line no stains, forming without deformation, shrinkage, variegated, flash and other undesirable

④	TUBE	1	BLACK TUBE, OD6.0mm, L=18mm, 125°C 600V
	COPPER FOIL	1	W=5*l=15mm, DOUBLE-SIDE COPPER FOIL
③	IN MOLD	3.7g	APPLE GRAY 45P TPE (MOLD NO:OPS-005)
	OVER MOLD	1g	IP-5 MATERIAL: PC APPLE WHITE, PIANT GRAYA USB LOGO(THE NEW MOLD EXTENDED) WHITE PROTECTIVE FILM
②	SNAP-FIT	1g	IP-5 SNAP-FIT MATERIAL: PC APPLE WHITE
	SHIELD CASE	1	C48 SHIELD CASE UP COVER, MATERIAL: COPPER NICKEL ZINC ALLOY, THICKNESS 0.3mm, WHITE"OPS0" LOGO
①	IS CONNECTOR	1	C48 SHIELD CASE UP COVER, MATERIAL: COPPER NICKEL ZINC ALLOY, THICKNESS 0.3mm, WHITE"OPS0" LOGO
	IN MOLD	4.5g	C48 THE ORIGINAL CONNECTOR
②	OVER MOLD	1g	APPLE GRAY 45P TPE (MOLD NO:OPS-005)
	CONNECTOR	1	IP-5 MATERIAL: PC APPLE WHITE, PIANT GRAYA USB LOGO(15 SURFACE) WHITE PROTECTIVE FILM
①	CALBE	1	USB A MALE SHORT BODY SOLID TYPE, WITH A TIN COP PEARL NICKEL PLATED FINE BANDING LINE, WHITE INSULATION RATED TEMPERATURE 250-270, PIN G/F, BETWEEN 4P WHITE SHELL, IS SHORT, Iphone DEDICATED
	NAME	Q'TY	3C+3D+1500D Huang Dansi+144 BRAID+AL 0D2.6mm, TPE APPLE WHITE DULL PALLISH JACKET

<h2>Cnc Tech, LLC</h2> <p>Industrial Cable and Connector Technology</p>			
DRAWN	Andy	DRAWING NO	
CHECKED		CUSTOMER	CNC
APPROVAL		ITEM NO.	104-1030-WH-00100
DECIDED		DATE	2014-10-27
VERSIONS/EDITION	A/0	PROJECTION	

4

3

2

1

A

B

C

D

A

B

C

D