



Max. Temperature : 260° during 10 seconds

								Dat.		Name		D-SUB SMT Low Profile Male 9p with die casted grounds and 4-40 UNC screwlocks		Maßstab/ Scale	
								Detail.		13Jul2007		ED		1,5:1	
								Insp.							
								Stand.							
09551663817.741				1	4-40 UNC	Black Insulator	Reel Packaging (160 connectors) see page 2/2	EC01215	14Jan2010	ED	HARTING EURL F-95972 Paris		TB 09 55 166 x817		Blatt/ Page 1 / 2
09551666817.741				2				34884	18Feb2008	LP					
09551667817.741				3				34379	13Jul2007	ED					
Part number				PL	Thread	Index designation	Mod.	Dat.	Name			Sub.			



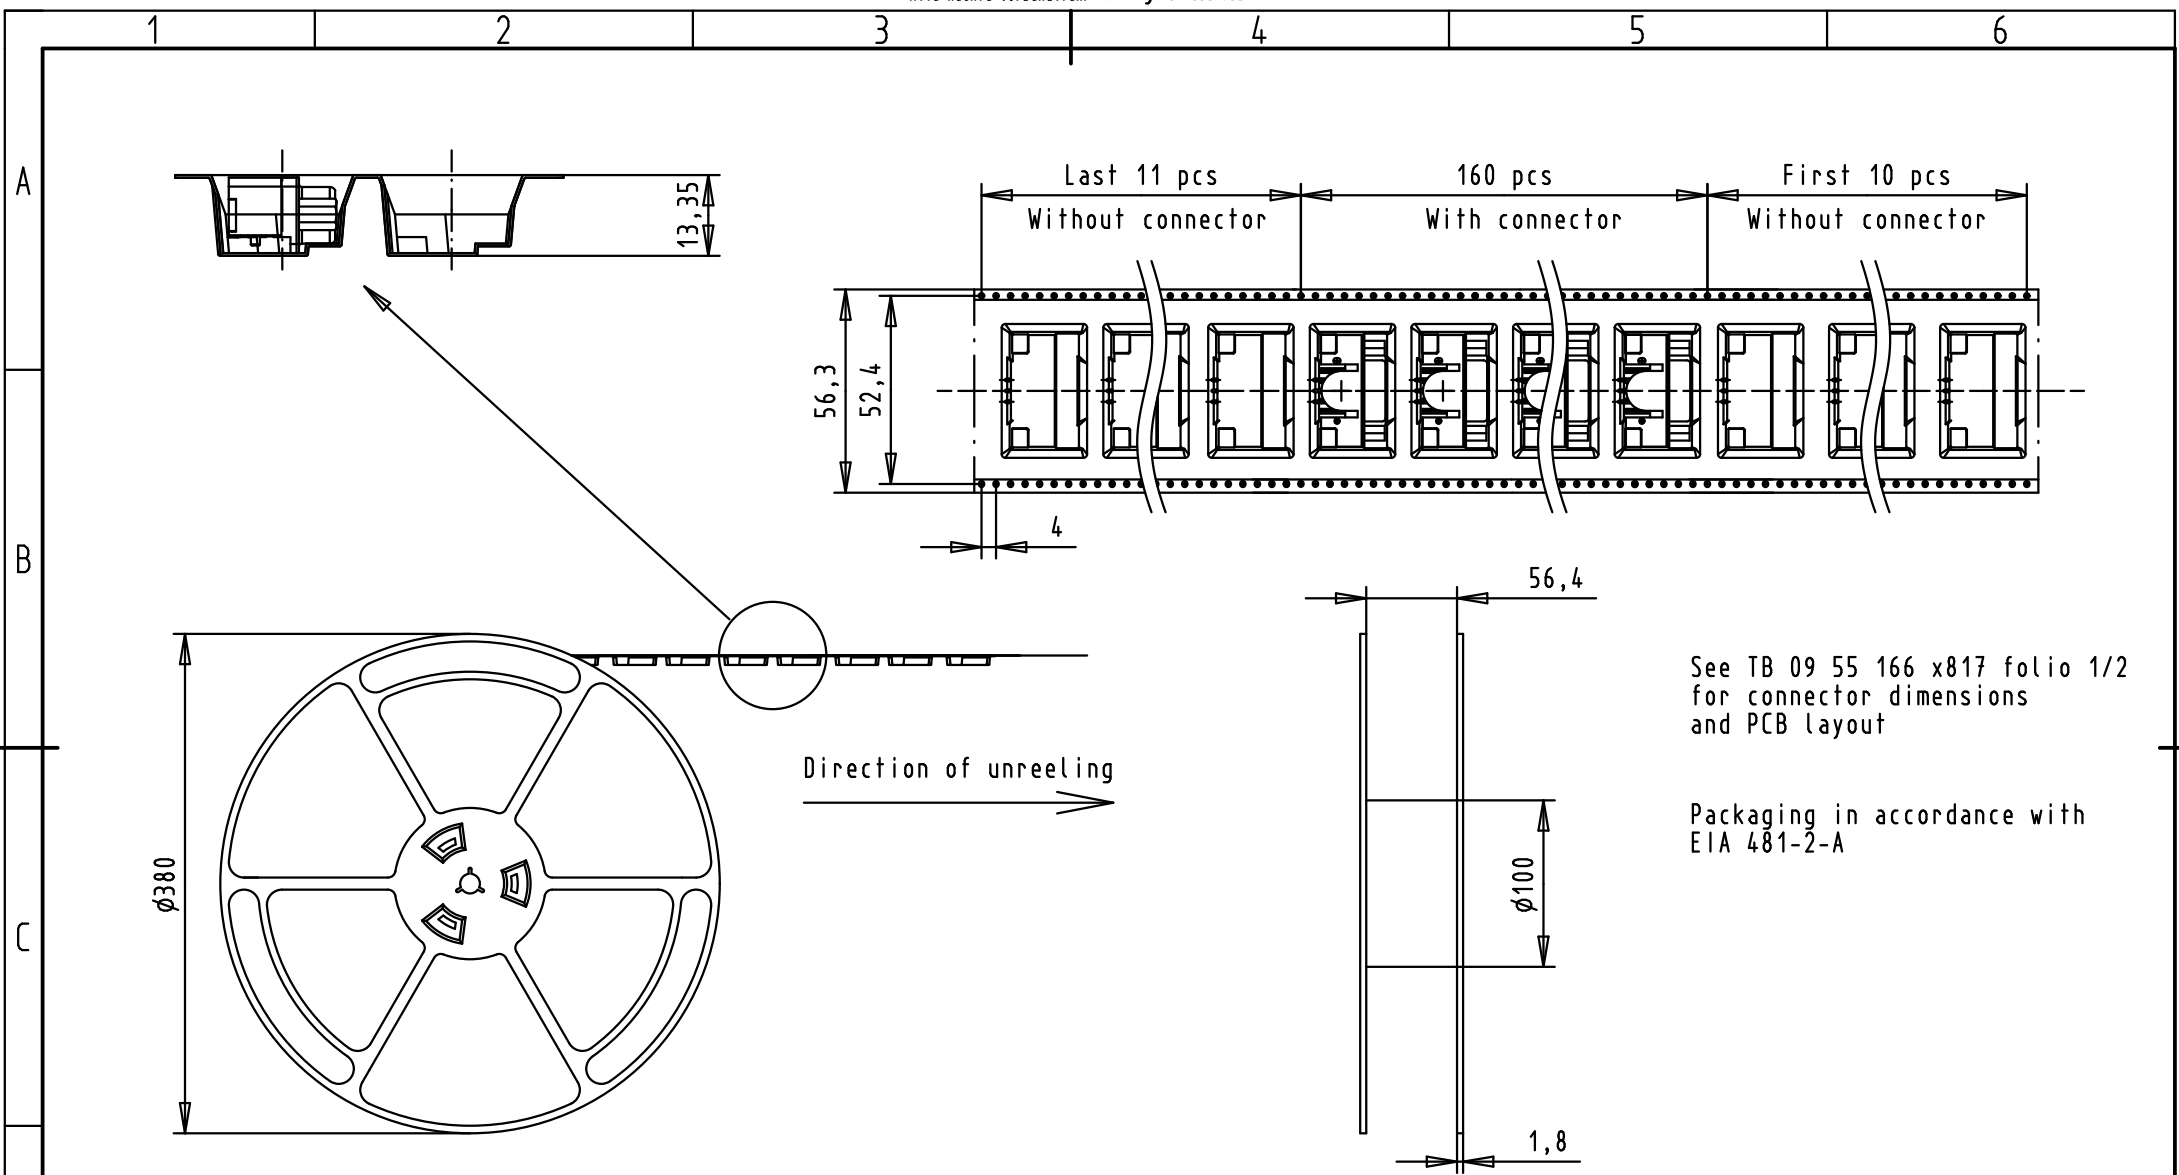

See TB 09 55 166 x817 folio 1/2 for connector dimensions and PCB layout

Packaging in accordance with EIA 481-2-A

09551663817.741	1	4-40 UNC	Black Insulator	Reel Packaging (160 connectors)
09551666817.741	2			
09551667817.741	3			
Part number	PL	Thread	Index designation	

				Dot.	Name	
				Detail.	13Jul2007	ED
EC01215	14Jan2010	ED	Insp.			
EC01118	26Nov2009	LP	Stand.			
34407	31Aug2007	ED				
34379	13Jul2007	ED				
Mod.	Dot.	Name	HARTING EURL F-95972 Paris			

All Dim. in mm
Orig. Size DIN A 4

D-SUB SMT
Low Profile Male 9p
with die casted grounds
and 4-40 UNC screwlocks

TB 09 55 166 x817

Sub.