


TOLERANCE ± .010

COIL: @ +25° C	
RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.0 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	100 g's 6 ± 1 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX  
CONTACT BOUNCE 2 MS MAX

### CUSTOMER DATA SHEET

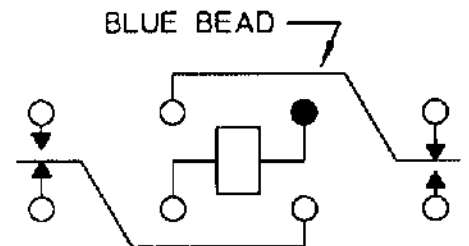

CONTACT RATING: LOW LEVEL TO 2A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 6/12/96 CK. 115/27/96

**COMMUNICATIONS  
INSTRUMENTS, INC.**

CUST. QPL  
CUST. NO. M39016/6-107L

TYPE "HFW" RELAY

HFW1131K04