

# Automotive Sub pF AG Series




## AVX Ultra-low Capacitance Automotive Varistor for ESD Protection for Automotive Circuits Sensitive to Capacitance

### GENERAL DESCRIPTION

AVX offers ultra-low capacitance ESD protection in the Sub 1pF range for use in automotive circuits that are sensitive to capacitance. The Automotive Sub pF Varistor (ASPV) is available in 0.8pF capacitance value in a compact 0402 low profile package. ASPV devices provide excellent response time to ESD strikes to protect sensitive circuits from over voltage.

The development of new information processing technologies call for ever increasing digital system speeds. Higher speeds necessitate the use of ultra-low capacitance values in order to minimize signal distortion.

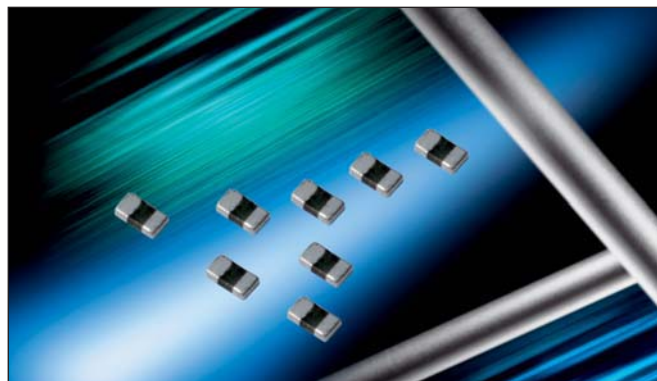

### GENERAL CHARACTERISTICS

- Operating Temperature: -55°C to +125°C
- Working Voltage: 16Vdc
- Case Size: 0402 low profile
- Capacitance < 1pF

### FEATURES

- High Reliability
- Capacitance < 1pF
- Bi-Directional protection
- Fastest response time to ESD strikes
- Multi-strike capability
- Low insertion loss
- Low profile 0402 case size
- AEC-Q 200 Qualified

### APPLICATIONS

- Antennas, RF circuits
- Optics
- HDMI, Firewire, Thunderbolt
- High speed communication bus
- GPS
- Camera link
- Sensors
- Touch screen interfaces
- Circuits sensitive to capacitance

### HOW TO ORDER

<b>VC</b>	<b>AS</b>	<b>H4</b>	<b>AG</b>	<b>16</b>	<b>0R8</b>	<b>M</b>	<b>A</b>	<b>T</b>	<b>W</b>	<b>A</b>
Varistor Chip	Automotive Series	Chip Size Low Profile 0402	Varistor Series AG Series Ultra-low Capacitance	Working Voltage 16 = 16V	Capacitance 0R8 = 0.8pF	Tolerance M = ±20%	N/A	Termination T = Ni Barrier/ 100% Sn	Reel Size W = 7"	Reel Quantity A = 10k

### ANTENNAGUARD CATALOG PART NUMBERS/ELECTRICAL VALUES

AVX Part Number	V <sub>w</sub> (DC)	V <sub>B</sub>	I <sub>L</sub>	Cap	Cap Tolerance	3db Freq (MHz)	Case Size
VCASH4AG160R8MA	≤16	125	1	0.8	±20%	5800	LP 0402

- V<sub>w</sub>(DC) DC Working Voltage (V)
- V<sub>B</sub> Typical Breakdown Voltage (V @ 1mA<sub>DC</sub>)
- I<sub>L</sub> Typical leakage current at the working voltage
- Cap Typical capacitance (pF) @ frequency specified and 0.5V<sub>RMS</sub>
- Freq Frequency at which capacitance is measured (M = 1MHz)




# Automotive Sub pF AG Series




## AVX Ultra-low Capacitance Automotive Varistor for ESD Protection for Automotive Circuits Sensitive to Capacitance


S21 Transmission Characteristics -SPV

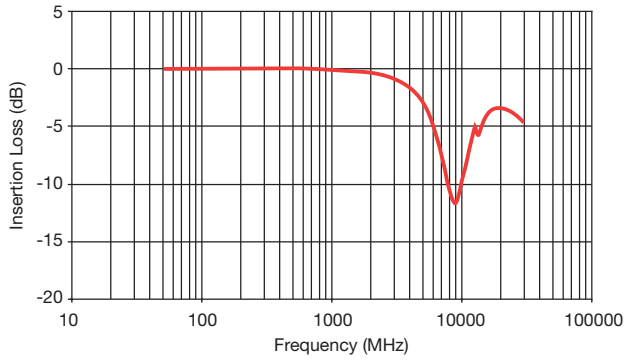

V/I Curve - SPV

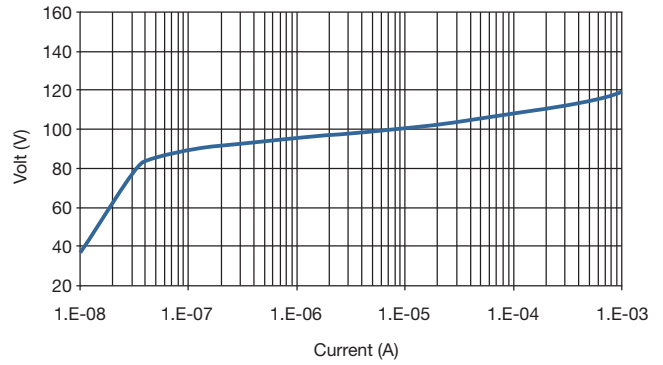

### DIMENSIONS

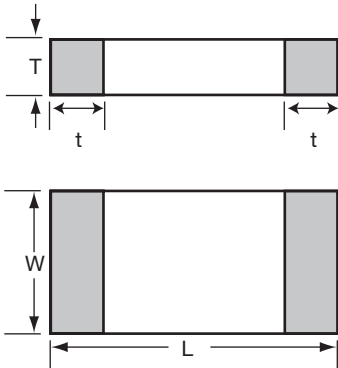

mm (inches)

Size (EIA)	0402
Length (L)	1.00 ±0.10 (0.040 ± 0.004)
Width (W)	0.50 ±0.10 (0.020 ±0.004)
Max Thickness (T)	0.35 (0.014)
Terminal (t)	0.25±0.15 (0.010±0.006)


# Automotive Sub pF AG Series




AVX Ultra-low Capacitance Automotive Varistor for ESD Protection for Automotive Circuits Sensitive to Capacitance

## EYE DIAGRAM - USB-HS (480MHZ) TEST

No Part

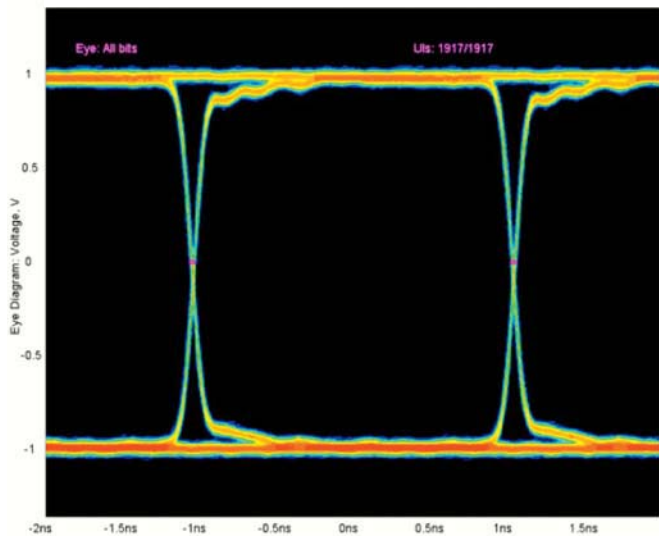


VCASH4AG160R8MATWA

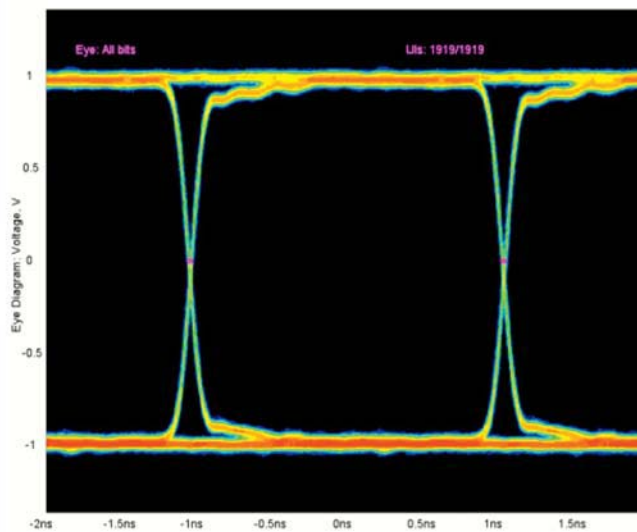

## EYE DIAGRAM - PCI-E (2.5GHZ) TEST

No Part

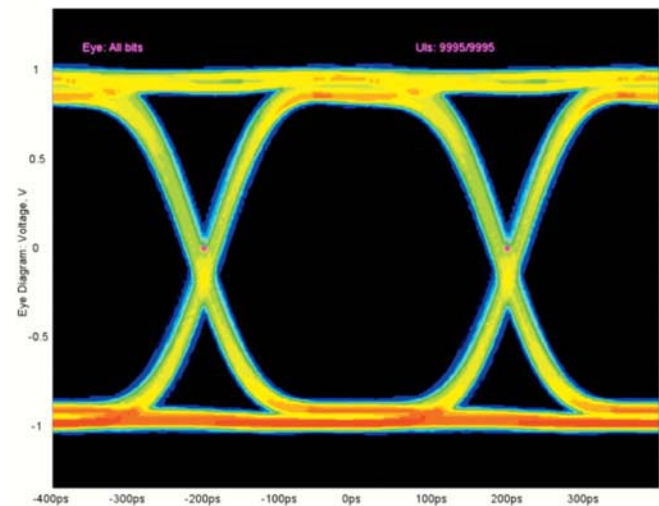

VCASH4AG160R8MATWA

