

**Ratings**

Voltage: 300 V  
 Temperature: -10 to 105 °C  
 Flammability: VW-1

**Conductor**

Conductor count: 2  
 Gauge: 20 AWG 0.52 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size: Ø 0.16 mm x 26  
 Max resistance at 20 °C: 36.7 ohm/km



**Outer jacket**

Material: PVC  
 Color: white  
 Diameter: 4 ±0.3 mm (2.0x4.0)  
 Nominal thickness: 0.38 mm

**Wire marking:** E339579 UL AWM STYLE 2651 20 AWG 105°C  
 300V VW-1 - - - cUL AWM I/II A 105°C 300V FT1 TENSILITY

**Tests**

Voltage test: 300 V  
 Spark test: 3.0 kV  
 Insulation tensile strength: 2.11 kgf/mm<sup>2</sup>  
 Jacket tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 136 ±2 °C for 7 days:  
     Minimum tensile strength 70 % original  
     Minimum elongation 65 % original  
 Heat shock: 136 ±1 °C /1 hour, no observed degradation  
 Deformation: 136 ±1 °C /1 hour, ≤ 50 %  
 Cold bend: -10 ±2 °C /1 hour, no observed cracking  
 Dielectric test: 2000 Vac for 1 minute without breakdown

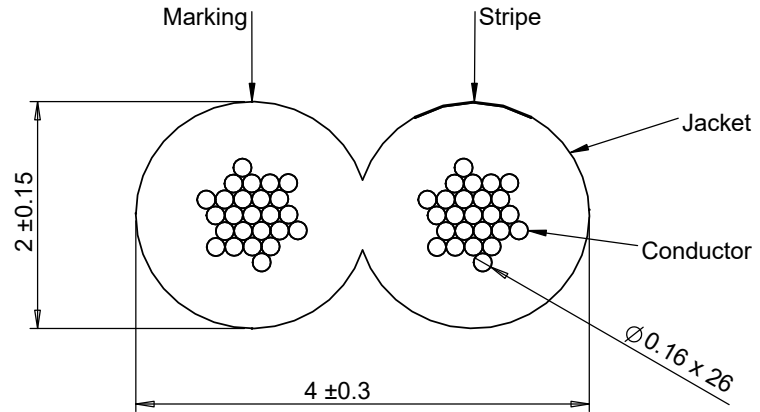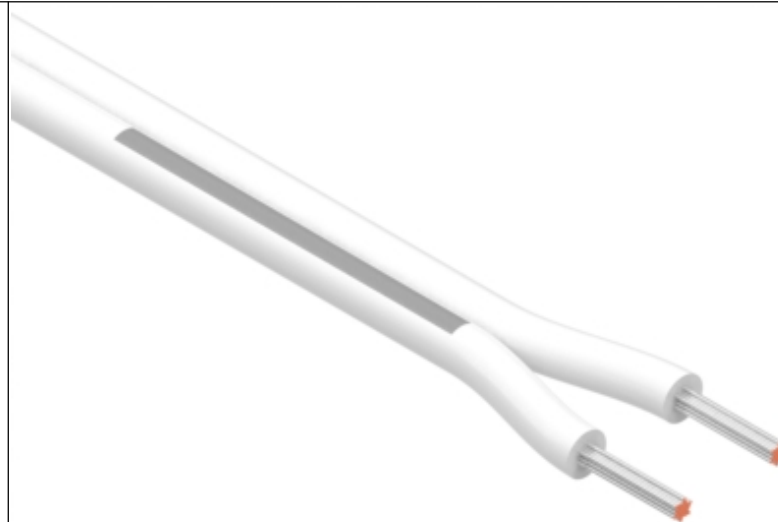

Revision:	Date:	Description:	Prepared:	Notes: RoHS and REACH compliant	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118                  fax 1.541.323.4202 web tensility.com</p>
A	10/25/2016	Initial release	Verified:		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size: Part number:
				Wire, 2C TS, 20 AWG, UL2651, 300V, 105C, 4.0 mm, VW-1, PVC, white	A 30-00797
				Scale: 15:1	Sheet 1 of 1