


- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. OPERATING TEMP.: -20°C to 55°C
  4. ▲ DENOTES CRITICAL PARAMETER.
  5. ILLUMINATION COLOR: BLUE
  6. HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)
  7. ILLUMINATION BASE RATING: 20mA 2.8V
  8. 2002/95/EC (ROHS) COMPLIANT



C	21422	REMOVE DUMMY SWITCH TERMINALS	3/31/14	EBP
B	20885	ADD DUMMY SWITCH TERMINALS	11/15/12	EBP
A	20713	RELEASE FOR PRODUCTION	8/21/12	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

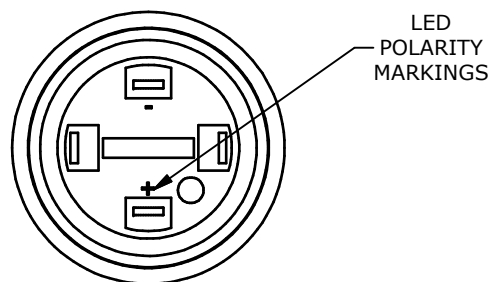

TITLE PV6F2PXSS-241

SCALE 2:1	DATE 8/21/2012	DR rc	DWG 52-PV6F2PXSS241	REV C
--------------	-------------------	----------	------------------------	----------