



SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

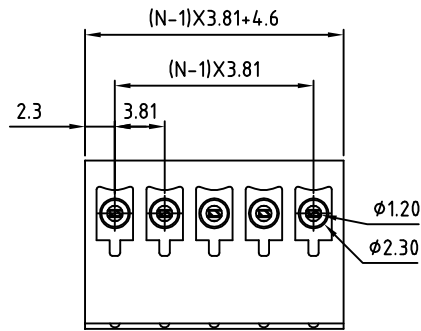


- Technical Data:
Material:
● Terminal Body(Contact pin): PhBz
● Insulator (housing): Thermoplastic(UL94V-0)
- Electrical
● Voltage rating: 160V
● Current rating: 6A
● Wire range:
Solid wire(AWG): 20-22
Stranded wire(AWG): 20-22
● Withstanding Voltage: 1.3KV
● Operating temperature: -30°C to +105°C

RoHS Compliant

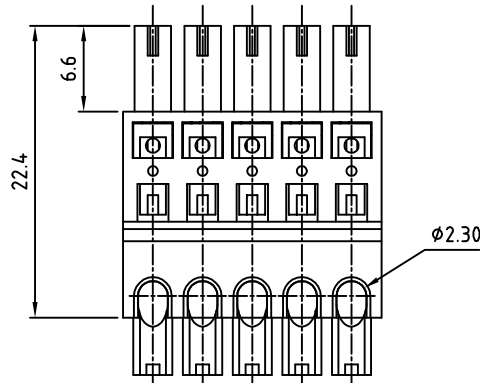

N=Number of contacts

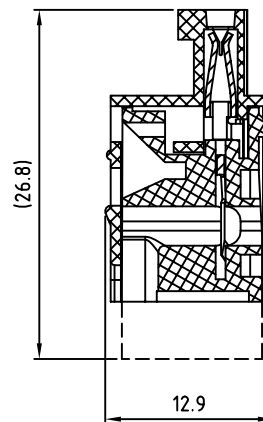

PART NUMBER:

OSTHPXX3050

No. of Poles
02: 2 Poles
:
24: 24 Poles

COLOR
0: Black
5: Green (Standard)
6: Blue
8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTHP 3.81 Series without flange				
PART NO.	OSTHPXX3050	DWG NO.	OSTHPXX3050.DWG			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
Shi Jun 2006.11.13	Marvin 2006.11.13	姜開福 2006.01.13	姜開福 2006.01.13		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					SHEET: 01/01	X.XX ±0.10
					REV: C	X° ±1°