

SUMMARY

Wires

Low	0
High	0
Coax	0
Triax	1
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	4M
Termination type	Female solder
IP rating	66
Cable Ø	0.00 - 0.00 mm
Matching parts	PHG.4M.650.CTAC11
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FBD*: Fixed plug with round flange (screw fixing)
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅ 0 - 0 mm
Variant	

Performance

Configuration	4M.650 : 1 Triax (50 Ohm)
Insulator	
Rated Current	26 Amps

Specifications


Contact Type:	Triaxial 50 Ohm (Solder)
Vtest:	1800 V (AC), 2540 V (DC)
Impedance:	50 Ohm

Others

Humidity (max): $\leq 95\%$ [at 60 deg C / 140 F]
 Vibration: 15 g [10 Hz - 2000 Hz]
 Shock Resistance: 100 g [6 ms]
 Salt Spray Corrosion: >144 hr
 Climatological Category: 55/175/21
 Shielding (min): 85 dB (10 MHz)
 IP Rating: 66

DRAWINGS

Draws

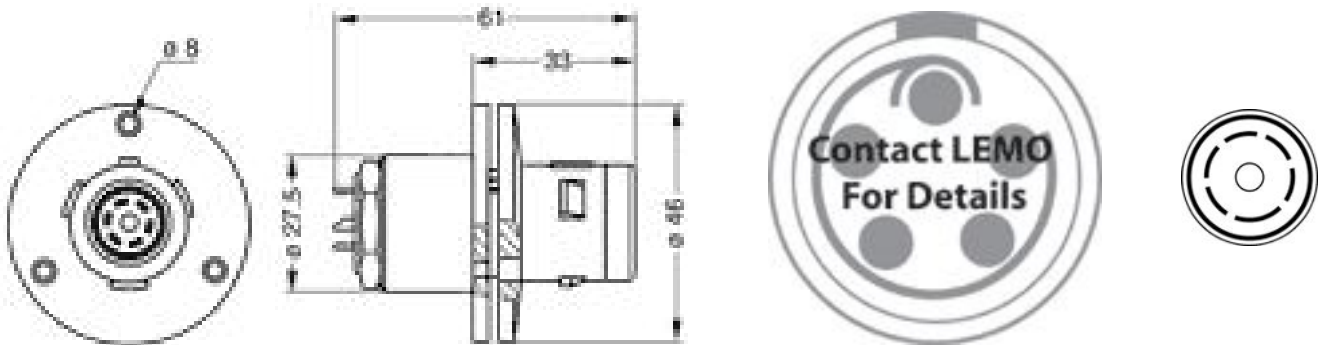

Dimensions

	A	B	L	M
mm.	46	27.5	61	33
in.	1,81	1,08	2,40	1,30

RECOMMENDED BY LEMO

Tools

None

Cables