


NOTES: (b)

1. METAL SHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY; PLATING (SEE PART NO.):
 - PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)
 - PLEASE ADD B for 20µm HARD GOLD over min. 50µm NICKEL
 - PLEASE ADD C for 30µm HARD GOLD over min. 50µm NICKEL
4. MOUNTING-BRACKETS: PBT GF UL 94 V-0; BLACK
5. THREADED LOCKS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
6. FIXING-PLATE: PBT GF UL 94 V-0, BLACK
7. GROUNDING BRACKETS: COPPER ALLOY
8. P.C.B. HOLE DRILLINGS ON SHEET 2
9. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
10. CONNECTOR IS PART MARKED: **163□17719X CONEC ABC** (see note 3)

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance		scale: 2:1 (5:1)
				date	name	material: SEE NOTES
				drawn	07.01.15 Henneboel	title: D-SUB HD MALE 90° 62pos. SOLDER PIN ANGLED 0.350inch with threaded lock, mounting and grounding bracket
				appd.	07.01.15 Lehmenkühler	
				norm		
				d-old	16K1A207A	dwg no:
4 x b	Ä5481	07.01.2015	K.H.		(b) 16K1A3570	DIN-A3 sh: 1/2
rev.	description	date	name	part no: (b) 163□17719X (see note 3)		

P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

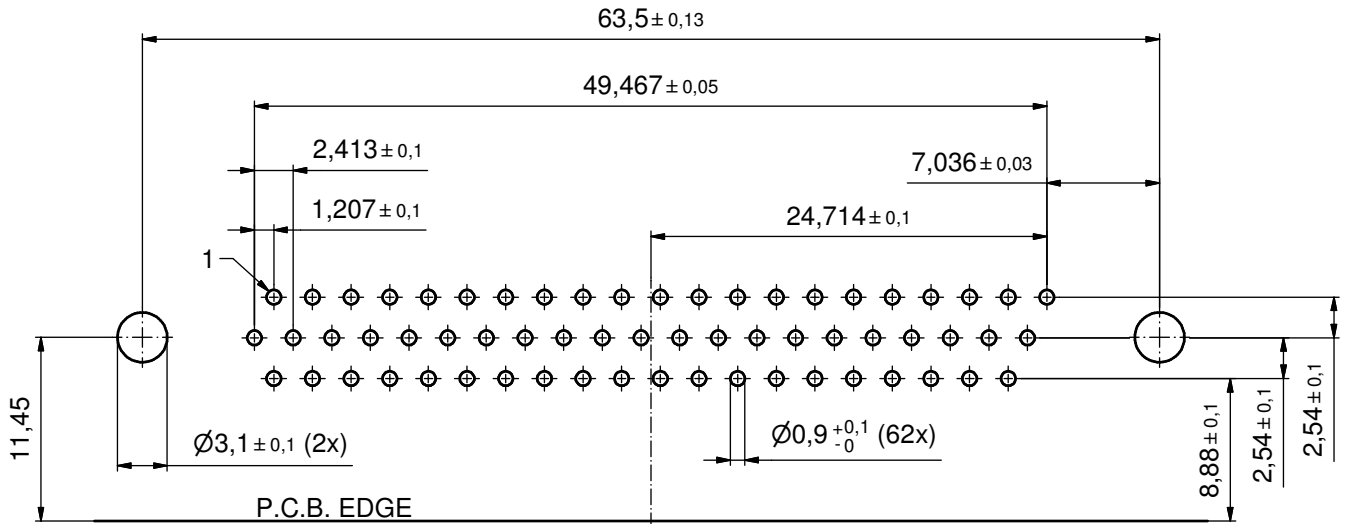

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND					tolerance		scale: 3:1
					date	name	material: see sheet 1
					drawn	07.01.15 Henneboel	title: P.C.B. HOLE DRILLINGS D-SUB HD MALE 90° 62pos. 0.350inch with threaded lock, mounting and grounding bracket
					appd.	07.01.15 Lehmenkühler	
					norm		
					d-old	16V1IH5B	dwg no:
	a	Original			CONEC ®		16K1A3570
rev.	description	date	name	part no: SEE SHEET 1			sh: 2/2