

NOTES:


1. FOR WAVESOLDERING (SOLDER BATH TEMPERATURE 260°C FOR 5 SEC. AND SOLDER PREHEAT 100°C FOR 30 SEC.)
2. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
3. INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
4. CONTACTS: COPPER ALLOY, PLATING (SEE PART NO.):
 - PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)
 - PLEASE ADD B for 20µin HARD GOLD over min. 50µin NICKEL
 - PLEASE ADD C for 30µin HARD GOLD over min. 50µin NICKEL
- CONTACT TAILS PRETINNED
5. MOUNTING BRACKET: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
6. RIVETED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
7. GROUNDING BRACKETS: COPPER ALLOY; TIN PLATED
8. CAPACITANCE: 830pF ± 20%
9. DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
10. P.C.B. HOLE DRILLINGS ON SHEET 2
11. CONNECTOR IS PART MARKED: **241□11060X CONEC ABC** (see note 4)

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance		dim. in mm	scale: 2:1 (5:1)		
				material: SEE NOTES		
	date	name		title: D-SUB C-FILTER MALE 90° 15pos. SOLDER PIN ANGLED 0.370inch with through hole, mounting and grounding bracket		
	drawn 18.09.2015	Henneboel				
appd. 18.09.2015	Lehmenkühler		dwg no: 24K1A1630			
norm			DIN-A3			
d-old			sh: 1/2			
a Original						
rev. description	date	name				part no: 241□11060X (see note 4)

P.C.B. HOLE DRILLINGS

(P.C.B. TOP SIDE)

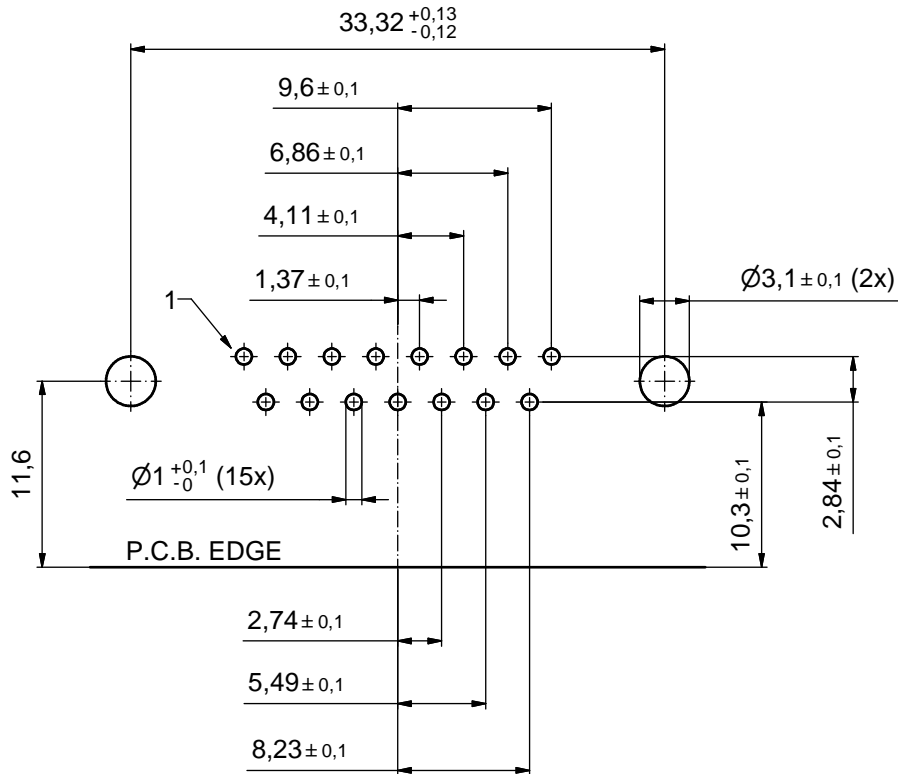

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance		scale: 3:1
				dim. in mm		material: SEE SHEET 1
	drawn	18.09.2015	Henneboel	title:		
	appd.	18.09.2015	Lehmenkühler	P.C.B. HOLE DRILLINGS		
	norm			D-SUB C-FILTER MALE 90° 15pos., 0.370inch with through hole, mounting and grounding bracket		
	d-old			dwg no:		
	a	Original		24K1A1630		
rev.	description	date	name			DIN-A3
			part no: SEE SHEET 1			sh: 2/2