


## Specification Sheet

Part Number: T18RWPM9M4

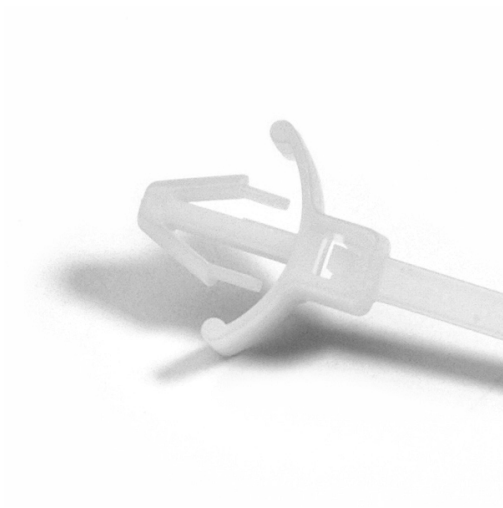

Arrowhead Push-Mount Cable Tie, 4.5"L, 18lb, 0.06"–0.13" Panel Thickness, PA66, Natural, 1000/pkg

<b>Article Number</b>	126-00603
<b>Type</b>	T18RWPM
<b>Color</b>	Natural (NA)
<b>Features &amp; Benefits</b>	<ul style="list-style-type: none"><li>• Easy and quick insertion ideal for production environment.</li><li>• Tie "clicks" into place upon final installation signaling installer insertion is complete.</li><li>• Arrowhead style mount provides low insertion and high extraction force.</li></ul>
<b>Quantity Per</b>	bag
<b>Product Description</b>	Arrowhead Wing Push Ties design helps stabilize the tie in high vibration applications. This can be used on sheet metal, wood, and cast iron.
<b>Short Description</b>	Arrowhead Push-Mount Cable Tie, 4.5"L, 18lb, 0.06"–0.13" Panel Thickness, PA66, Natural, 1000/pkg

Global Part Name

T18RWPM-PA66-NA

Minimum Tensile Strength (Imperial)

18.0

Minimum Tensile Strength (Metric)

80

Length L (Imperial)

4.5

Length L (Metric)

113.0

Fixation Method

Arrowhead

Identification Plate Position

none

Releasable Closure

No

Tie Closure

plastic pawl

Variant

Inside Serrated

Width W (Imperial)

0.1

Width W (Metric)

2.5

Bundle Diameter Min (Imperial)

0.06

Bundle Diameter Min (Metric)

1.5

Bundle Diameter Max (Imperial)

0.86

Bundle Diameter Max (Metric)

22.0

Thickness T (Imperial)

0.043

<b>Thickness T (Metric)</b>	1.1
<b>Height H (Imperial)</b>	.23
<b>Height H (Metric)</b>	5.80
<b>Panel Thickness Min(Imperial)</b>	0.06
<b>Panel Thickness Max(Imperial)</b>	0.13
<b>Panel Thickness Min (Metric)</b>	1.52
<b>Panel Thickness Max (Metric)</b>	3.2
<b>Mounting Hole Diameter D (Imperial)</b>	0.19 - 0.22
<b>Mounting Hole Diameter D (Metric)</b>	4.8 - 5.6 mm
<b>Mounting Hole Diameter D Min (Imperial)</b>	0.19
<b>Mounting Hole Diameter D Max (Imperial)</b>	0.22
<b>Mounting Hole Diameter D Max (Metric)</b>	5.6
<b>Disc Diameter(Metric)</b>	13.1
<b>Disc Diameter (Imperial)</b>	0.5
<b>Material</b>	Polyamide 6.6 (PA66)
<b>Material Shortcut</b>	PA66

<b>Flammability</b>	UL 94 V2
<b>Operating Temperature (Metric)</b>	-40°F to +185°F (-40°C to +85°C)
<b>ROHS Complaint</b>	Yes
<b>Certification/Specification WEB</b>	UL-ZODZ2.E64139
<b>UL Recognized (US)</b>	Yes
<b>UL Recognized (US and Canada)</b>	Yes
<b>Package Quantity(Imperial)</b>	1000
<b>Package Quantity (Metric)</b>	1000
<b>Customs Number</b>	3926909987