



P.C.B. LAYOUT





CIRCUIT: SPST

- NOTES:
1. ALL DIMENSIONS IN MM
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. RATING: 50mA @ 12VDC
  4. TRAVEL: 0.25 +0.2/0.1mm
  5. OPERATING FORCE: 160±50gf
  6. CONTACT RESISTANCE: 100 Milli-Ohms Max
  7. 2002/95/EC (ROHS) COMPLIANT
  8. SHORTER LEAD WITH COLOR IS NEGATIVE (CATHODE).
  9. ▲ DENOTES CRITICAL PARAMETER

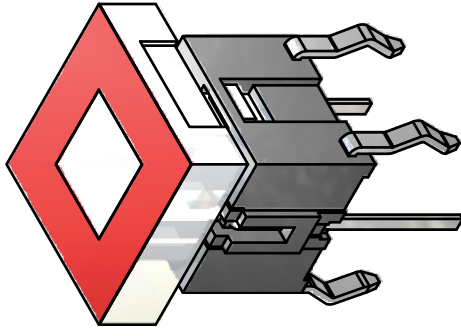

ISOMETRIC

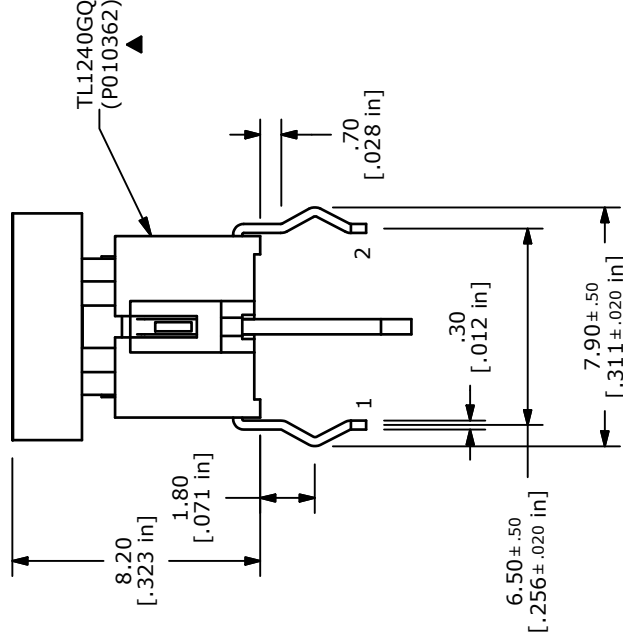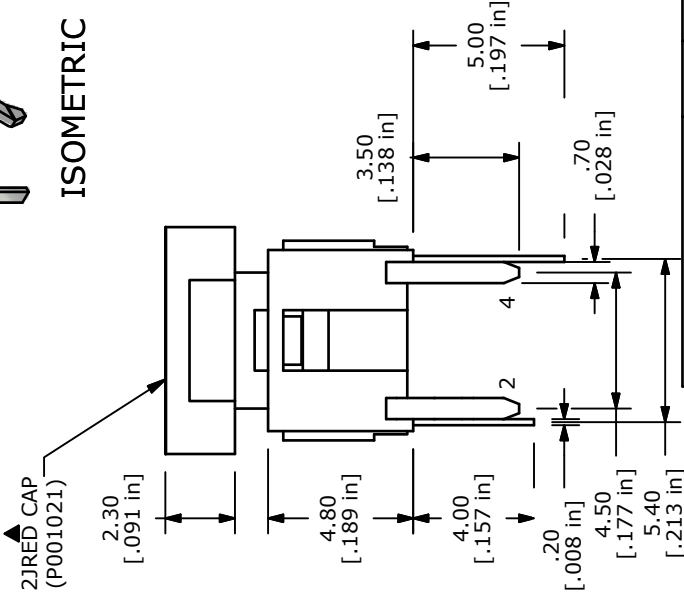

LED SPECS	UNITS	GREEN
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	2.1-2.5
LUMINOUS INTENSITY	MCD	5

**E-SWITCH®**

TITLE TL1240GQ2JRED

B	19550	DRAWING UPDATE / CLEAN-UP	12/28/10	BGL
A	15421	RELEASED FOR PRODUCTION	10/31/05	PH
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	4:1	DATE	10/31/2005	DR	PH	DWG	XP0280A	REV	B
-------	-----	------	------------	----	----	-----	---------	-----	---