

REVISION C

DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE NOTED	TOLERANCES ARE:
ONE PLACE DECIMALS: ± .1	THREE PLACE DECIMALS: ± .005	ANGLES	±
TWO PLACE DECIMALS: ± .01	FOUR PLACE DECIMALS: ± .0002		

TITLE:	DWG NO:
HIC ASSEMBLY	HIC-764-SST
	SHEET 1 OF 1


- NOTES:
1. PUSHOUT TO BE 3 lb. MIN.
 2. PACKAGED IN TUBES - USE PT-1-24-01-34 / TP-07.

HIC-764-SST

.750 ROW SPACES/64 CONTACTS

LEAD STYLE
-S: SOLDER TAIL

PLATING
ST: .000010 Au. CONTACT
.000200 TIN SHELL
(USE SC-1P2-ST)

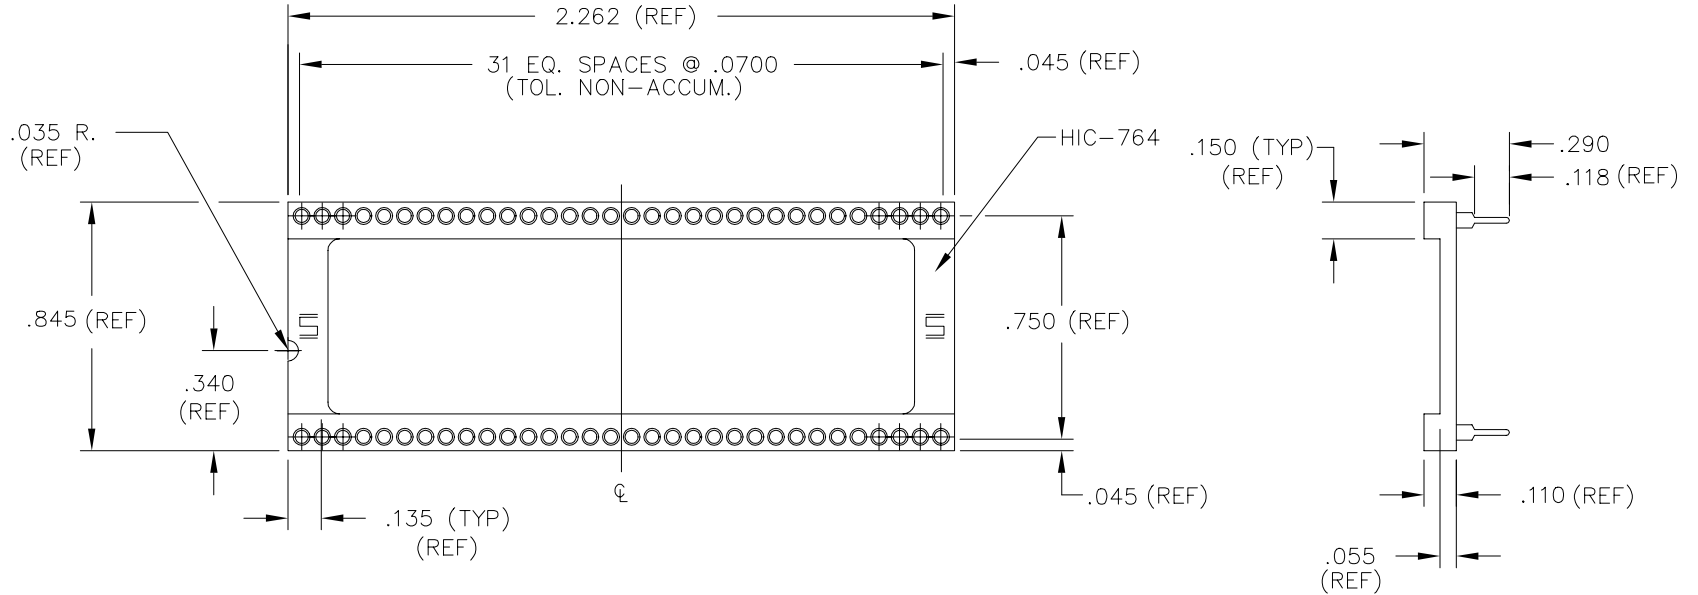

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

MATERIAL:
INSULATOR:
BLACK GLASS FILLED POLYESTER UL94V-0

CONTACT:
BeCu, ALLOY 172 H, FED SPEC. QQ-C-533

SHELL:
1/2 HARD BRASS, COMP 22, FED SPEC. QQ-B-626

samtec

MISC/MKTG
HIC-MKT

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: G. PURVIS 7-8-91
CHECKED BY: BRYANT 7-8-91

ENGINEER
APPROVAL
PAE

HIC-764-SST
SHEET 1 OF 1