

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes


	From	To
Wire Sizes	2/0 AWG	4-3 AWG STR & 2 AWG SOLID
Wire Types	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric
Wire Strip Lengths	1-1/16 in.	1-5/16 in.
Panduit Color Code on Barrels	BLACK	GRAY
Panduit Die Index No. on Barrels	P45	P29
Alternate Industry Die Index No. () on Barrels	(13)	(8)



CERTIFIED



LISTED Wire Connector

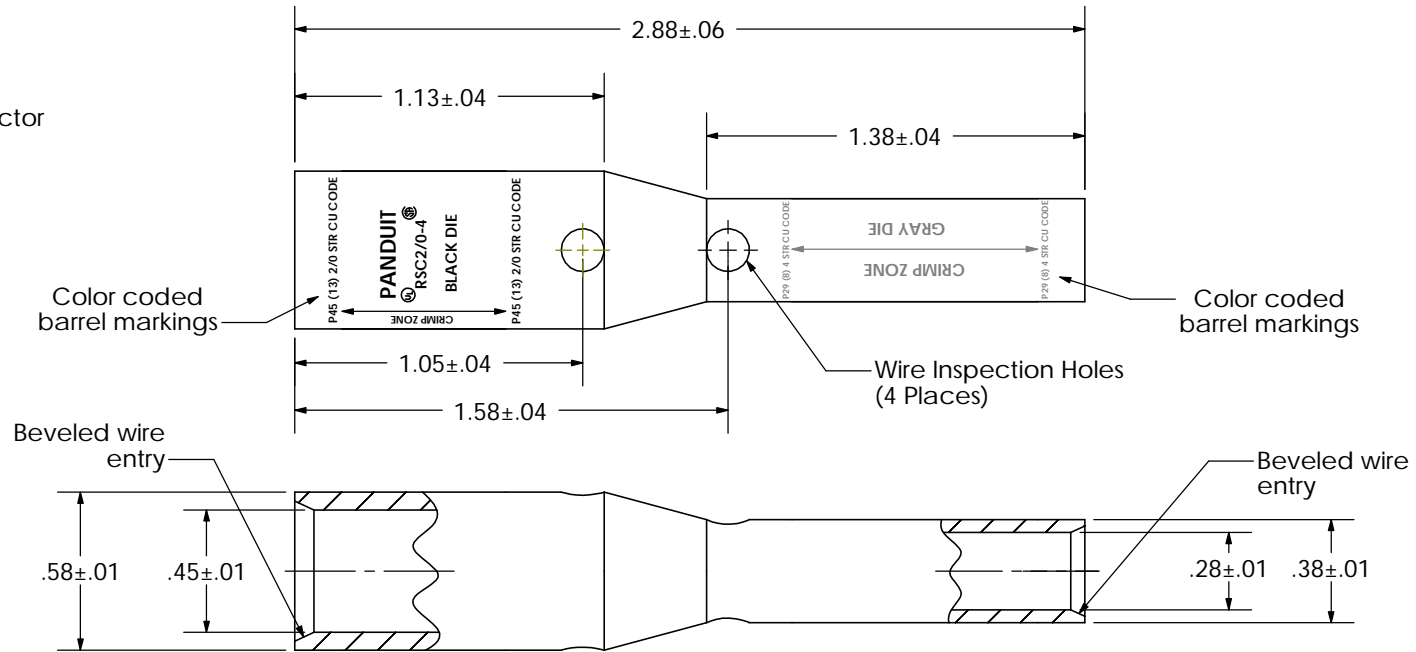

REV	DATE	BY	CHK	DESCRIPTION	ECN
03	3/04	KLFU	KLFU	Wire size TO was: 4 AWG	11644

PANDUIT CORP. TINLEY PARK, ILLINOIS

RSC2/0-4-X
Copper Reducing Splice With Inspection Holes

SCALE N/A DRAWING NO / CAD FILE RSC2_0-4-CUST