



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
C		EC 0G3C 0734 04		16DEC04	BSV	JG	

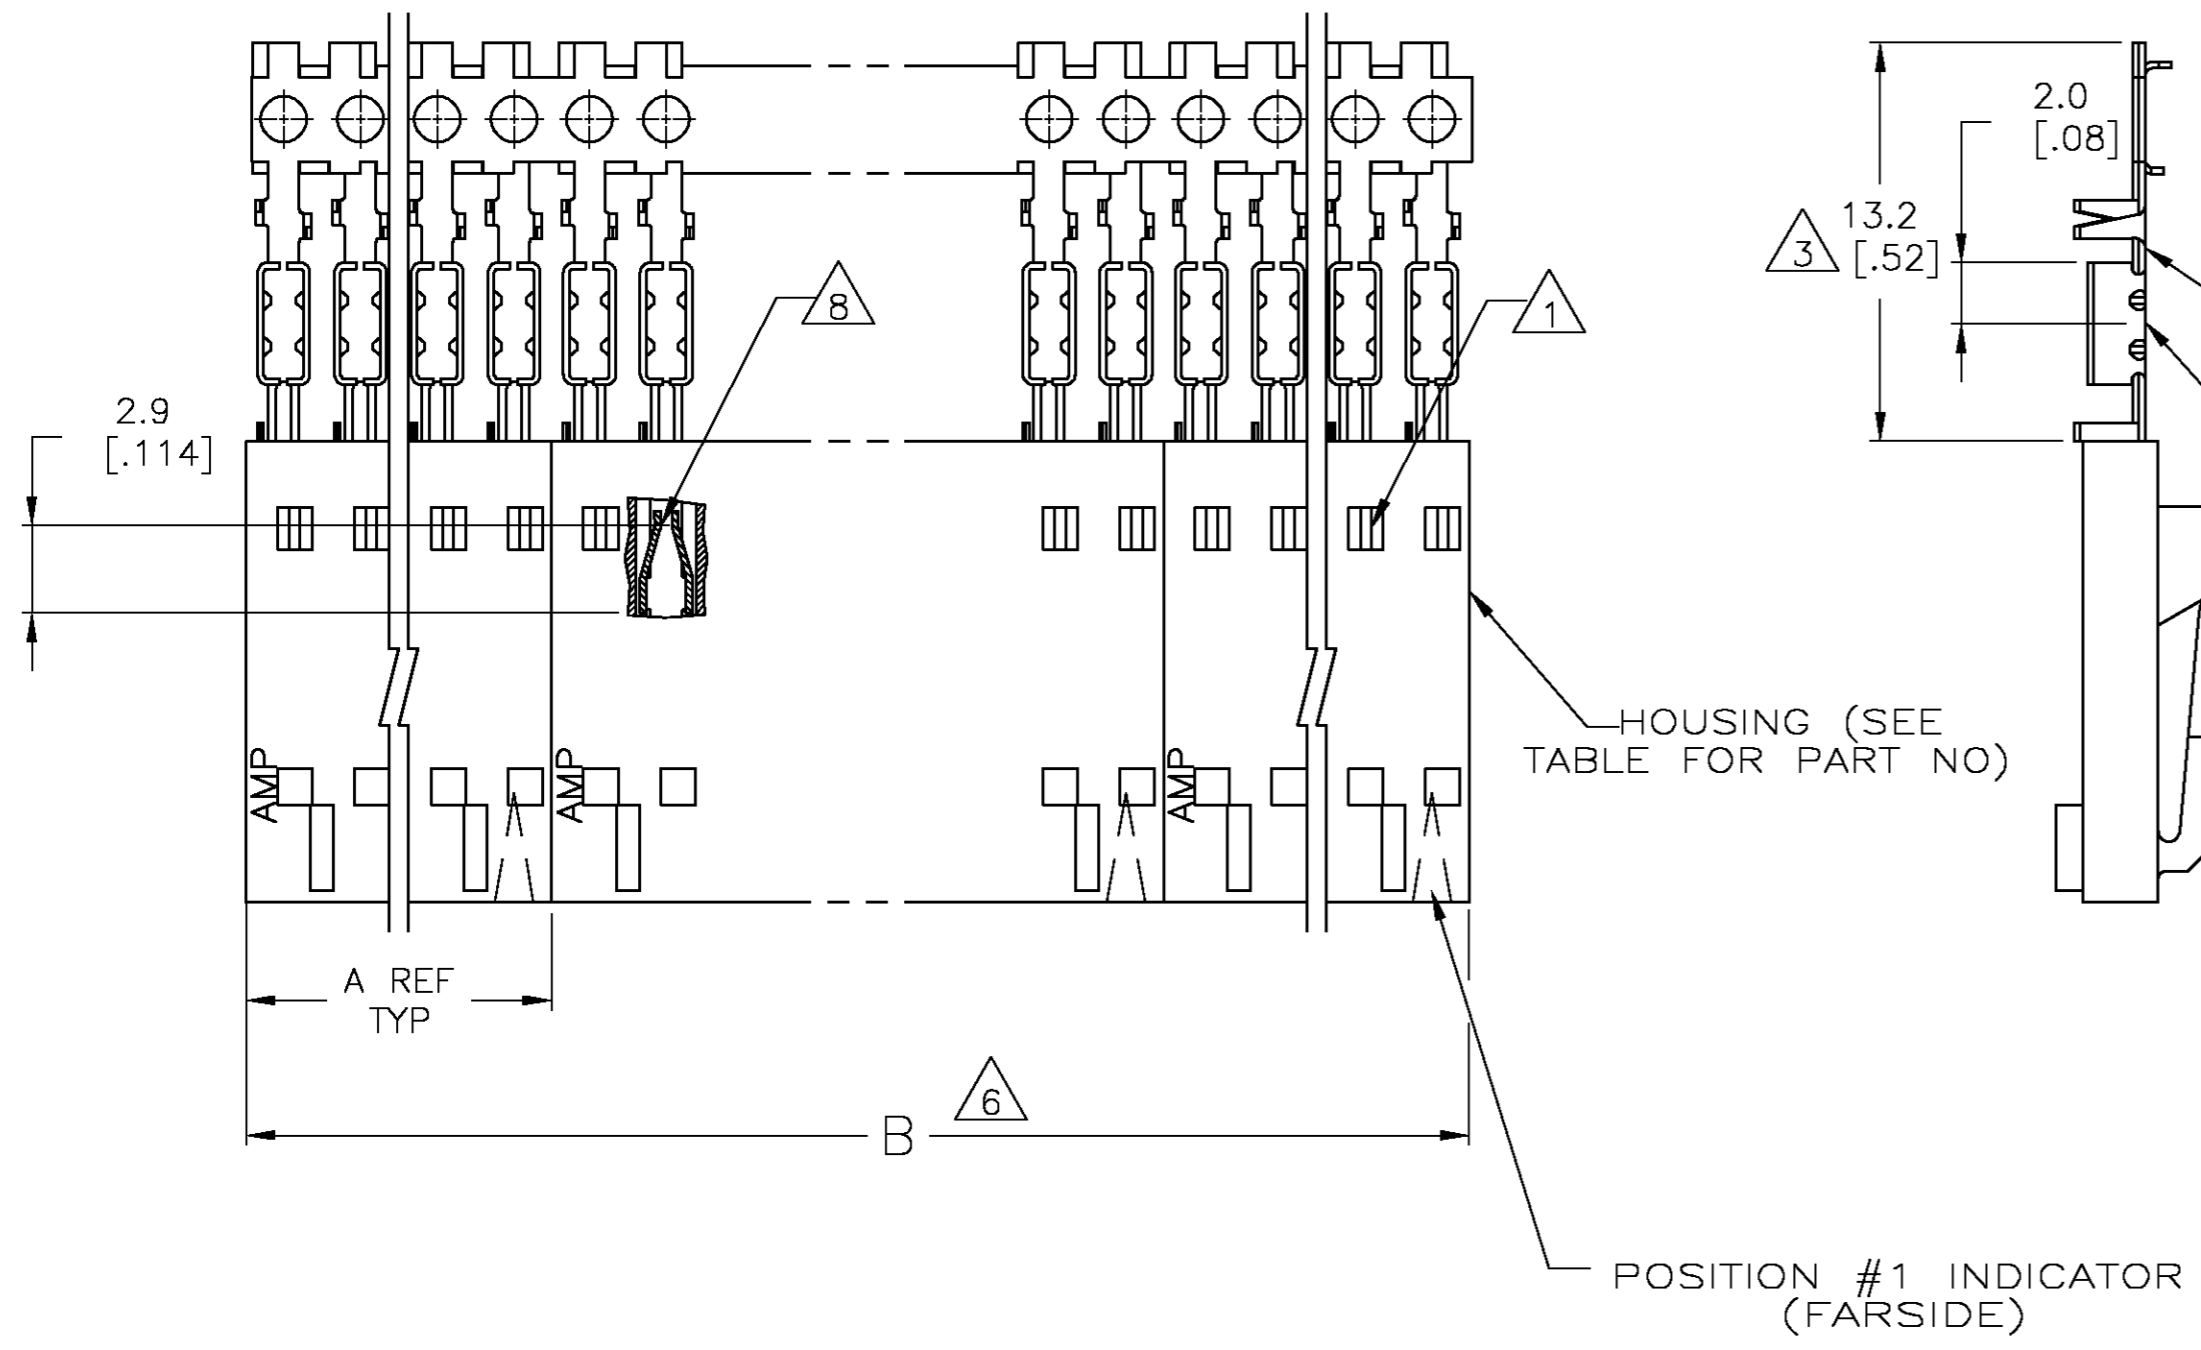

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS.
- 2 USE WITH #22-#26 AWG WIRE SIZE, 1.37[.054]/0.76[.030] INSULATION DIAMETER, 0.38[.015] MAXIMUM INSULATION THICKNESS.
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE.
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 6 HOUSING MAT'L: FLAME RETARDANT POLYCARBONATE. COLOR: BLACK. CONTACT MAT'L: PHOS BRONZE.
- 7 CONTACT FINISH: 000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 8 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 9 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 10 .000100-.000200 MATTE TIN OVER .000050 NICKEL

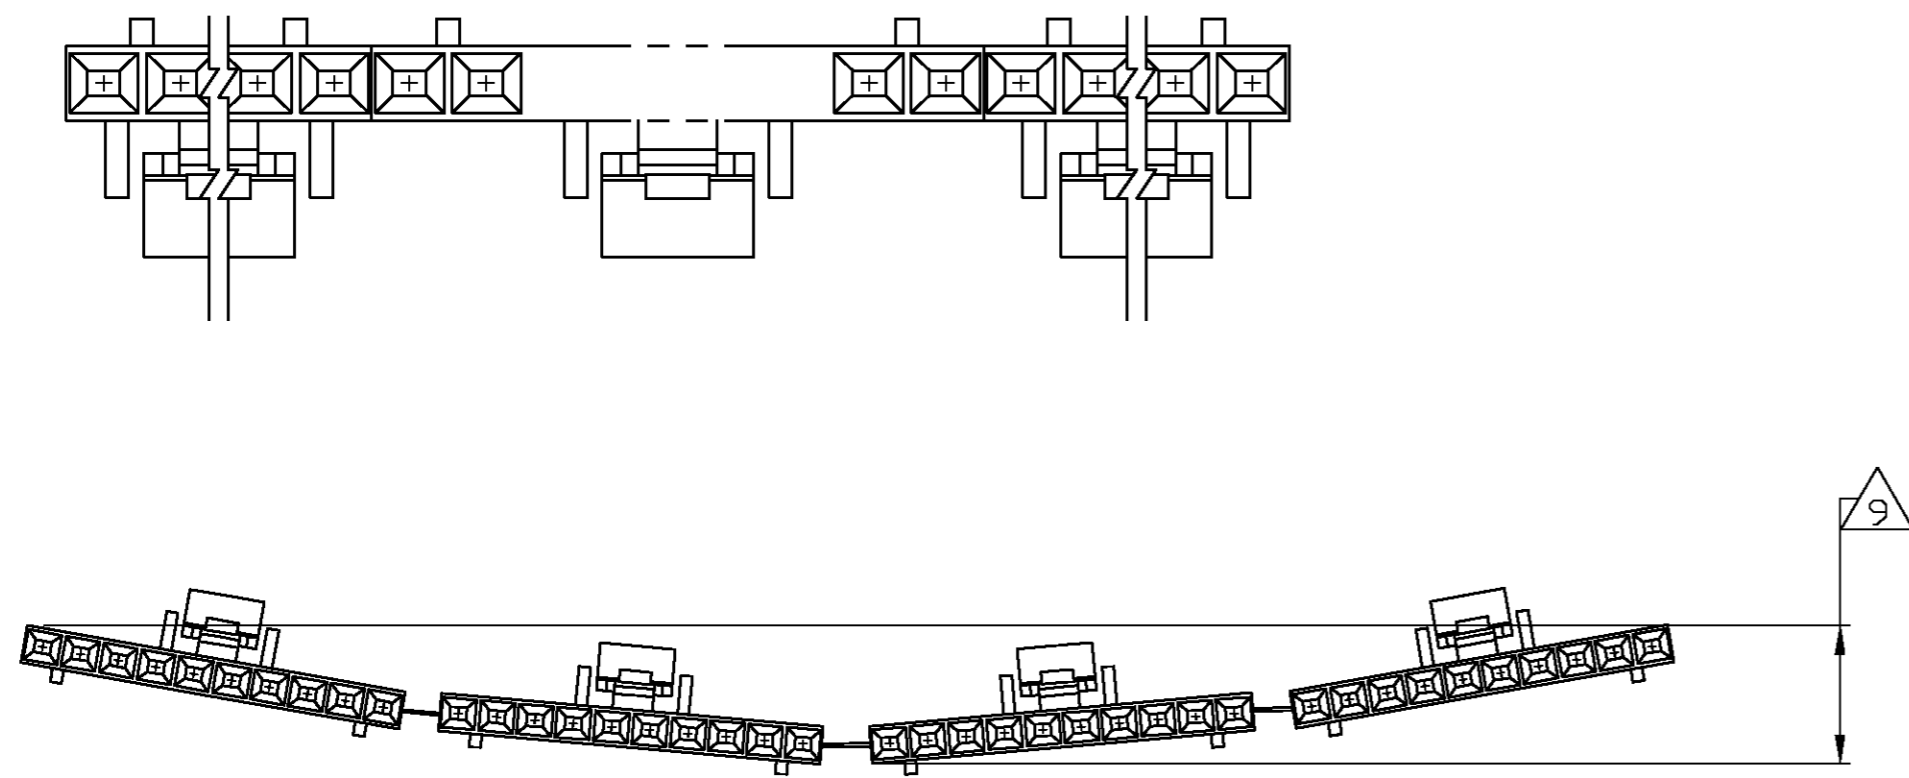

EXAMPLE: STRIP ASSEMBLY
SCALE 2:1

10	2	25.3 [.996]	12.65 [.498]	104920-4	5	5-104922-4
7	2	25.3 [.996]	12.65 [.498]	104920-4	5	104922-4
PLATING	5	B	A	HOUSING PART NUMBER	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	J. HERRINGTON	2-27-95	Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
CHK	J. GESFORD	2-27-95				
APVD	D. DUPLER	2-27-95				
NAME	RCPT ASSY, AMPMODU MTE, SINGLE ROW, 2.54[.100] C/L, LATCHED & POLARIZED FOR #22-#26 AWG WIRE SIZE, STRIP FORM, SPECIAL					
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
mm	0 PLC ± -	1 PLC ± 0.5[.02]	108-25034	A2	00779	104922
	2 PLC ± 0.13[.005]	3 PLC ± -	114-25026	SCALE 4:1		SHEET 1 OF 1
	4 PLC ± -	ANGLES ± -	WEIGHT -	CUSTOMER DRAWING		REV C
MATERIAL	FINISH SEE TABLE					