

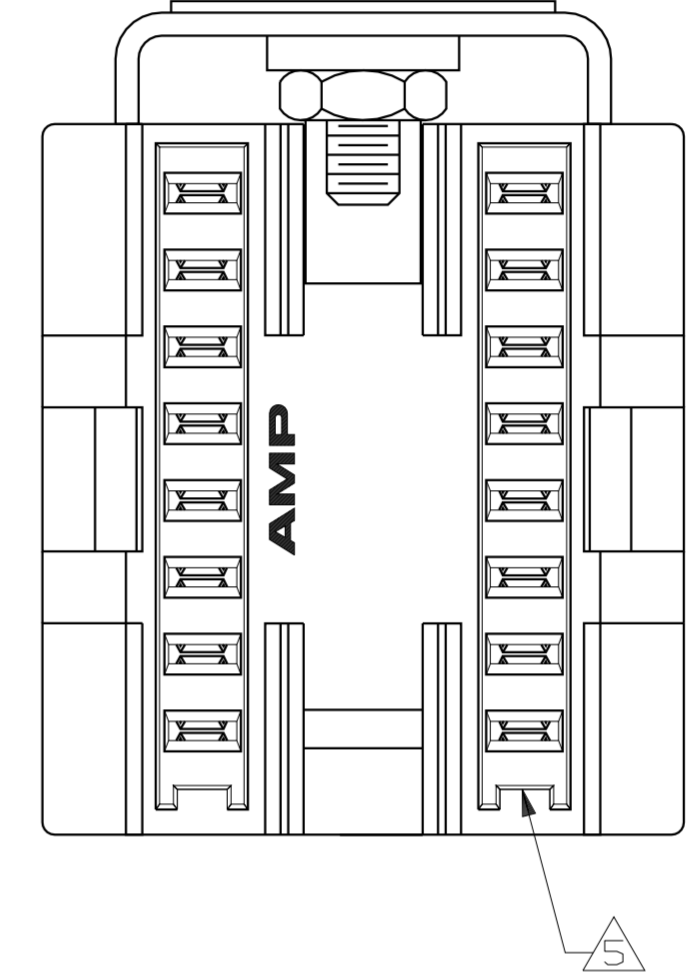
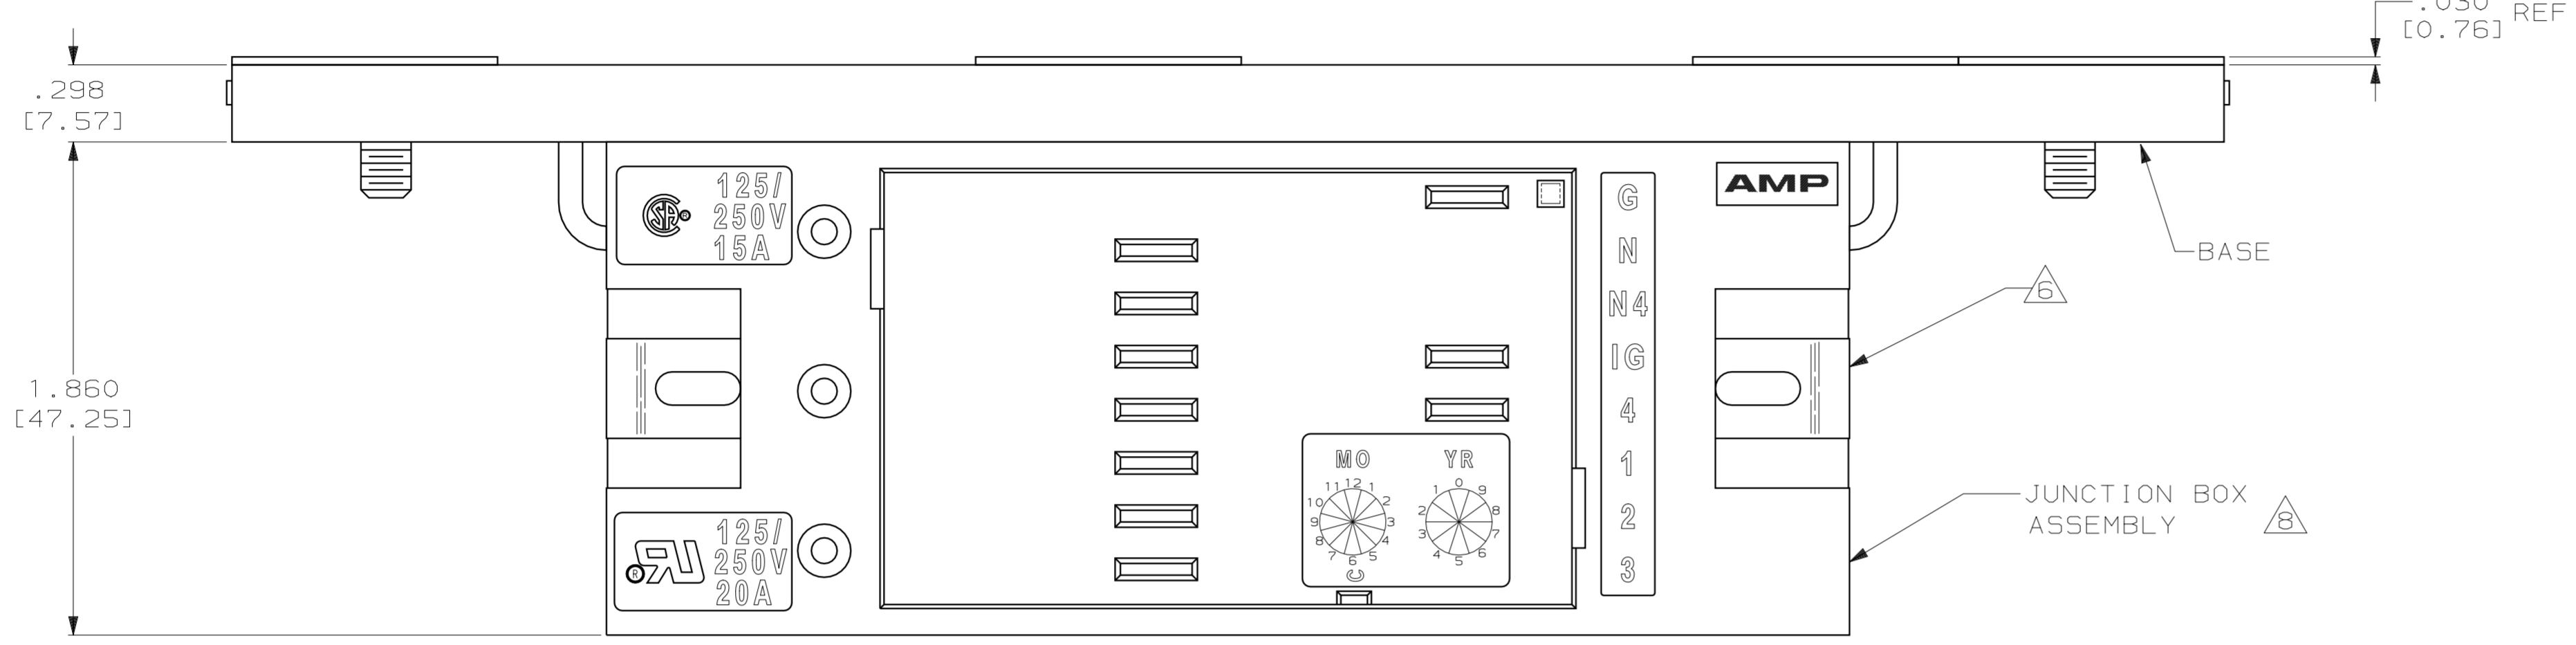
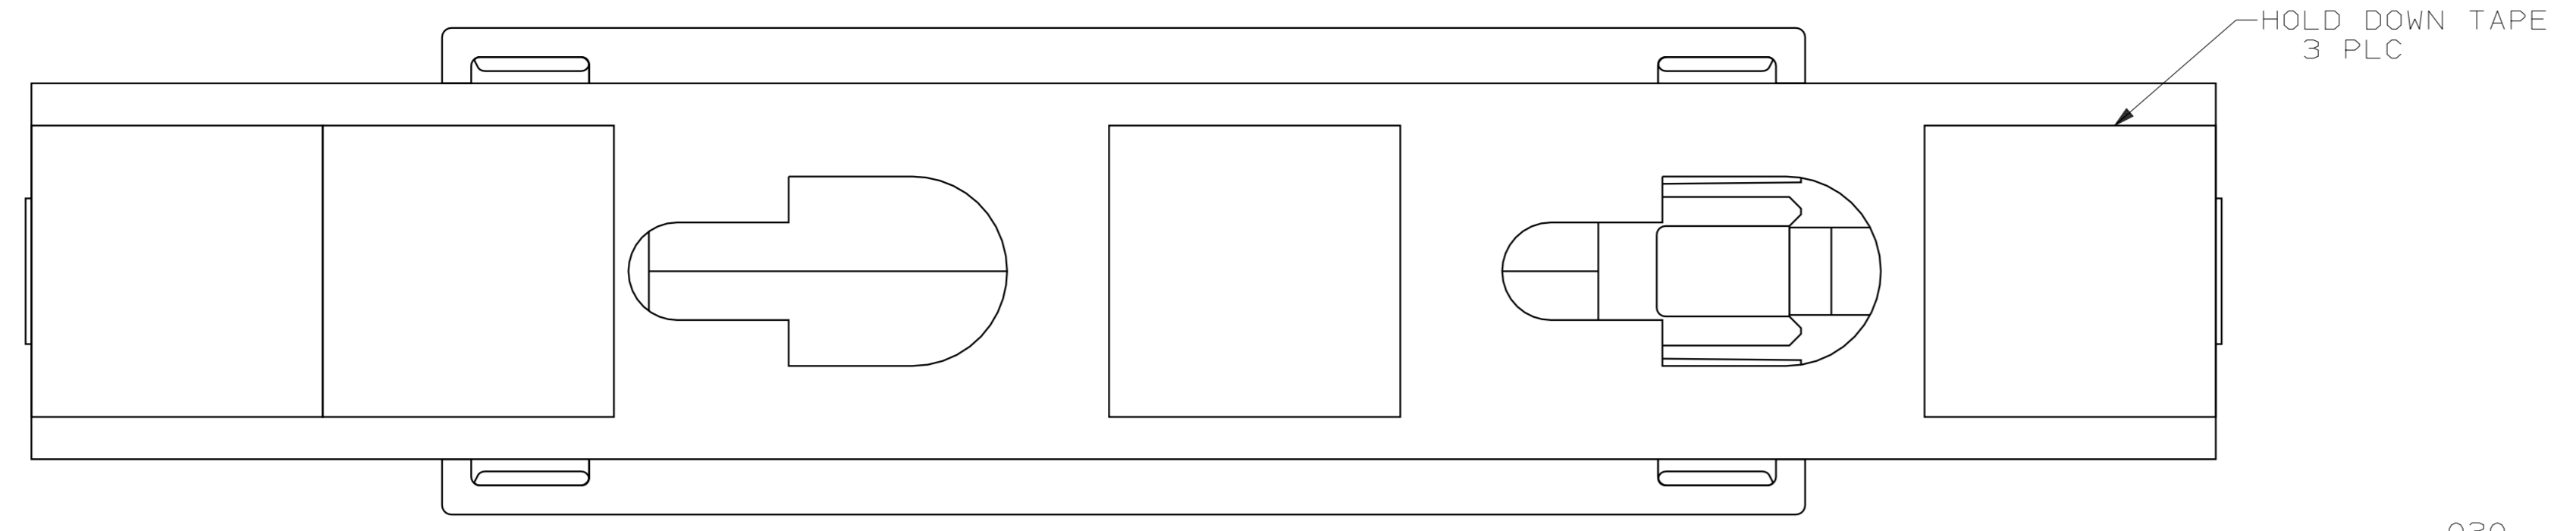
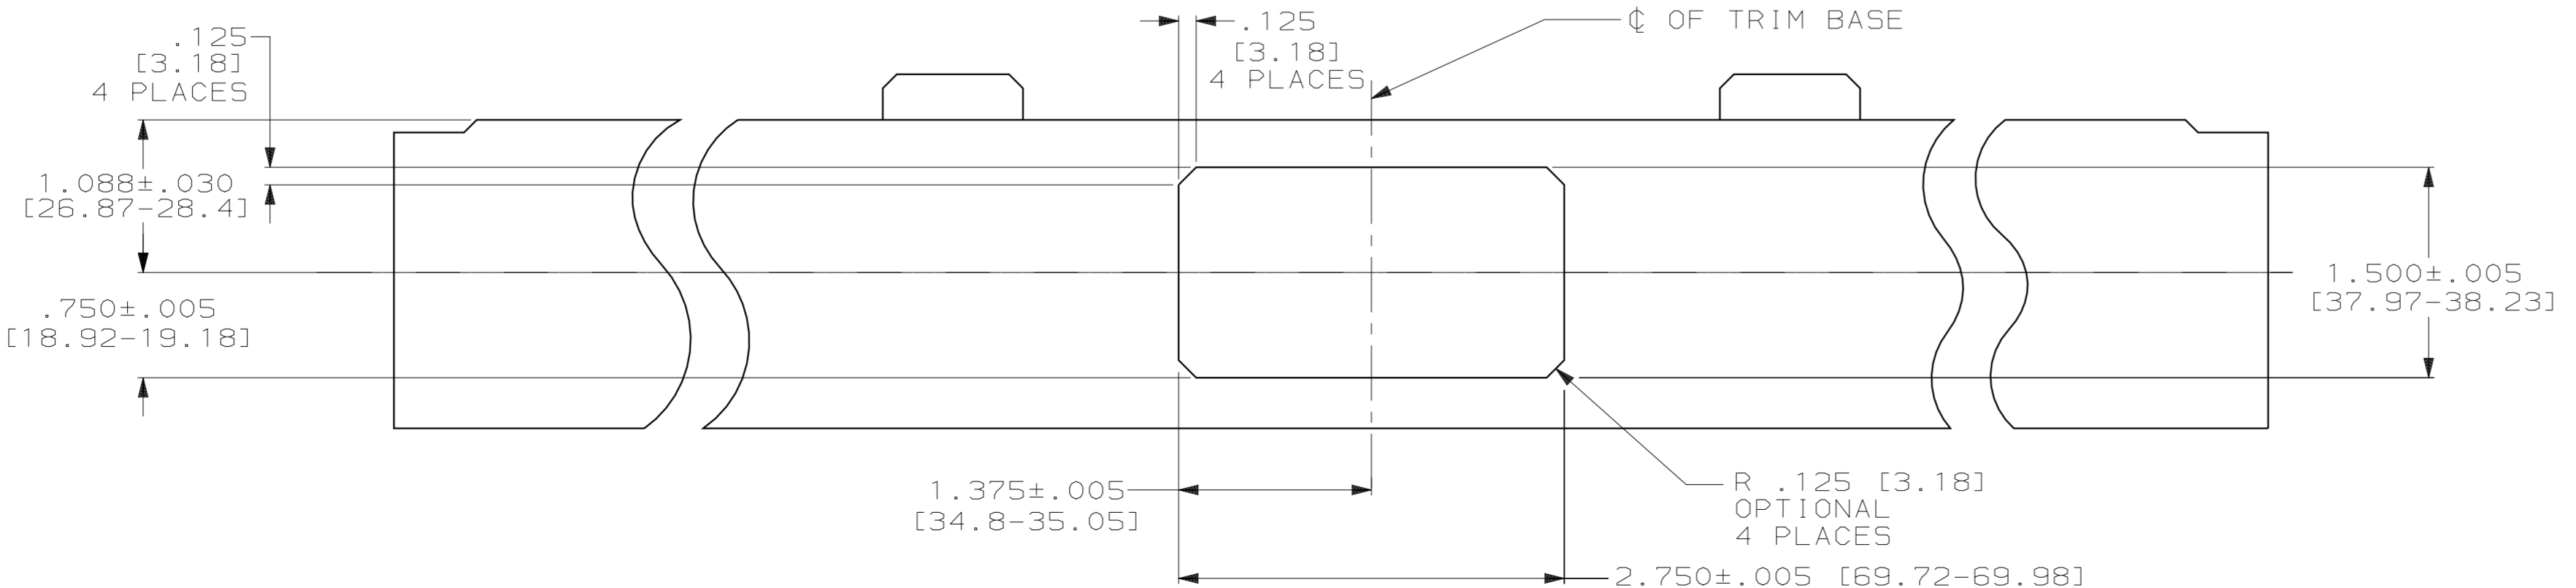


LOC		DIST		P		F		ZONE		LTR		REVISIONS			
AA	27											DESCRIPTION	DATE	APPD	
												A	RLSD; NPR C90-315	1-24-91	V5

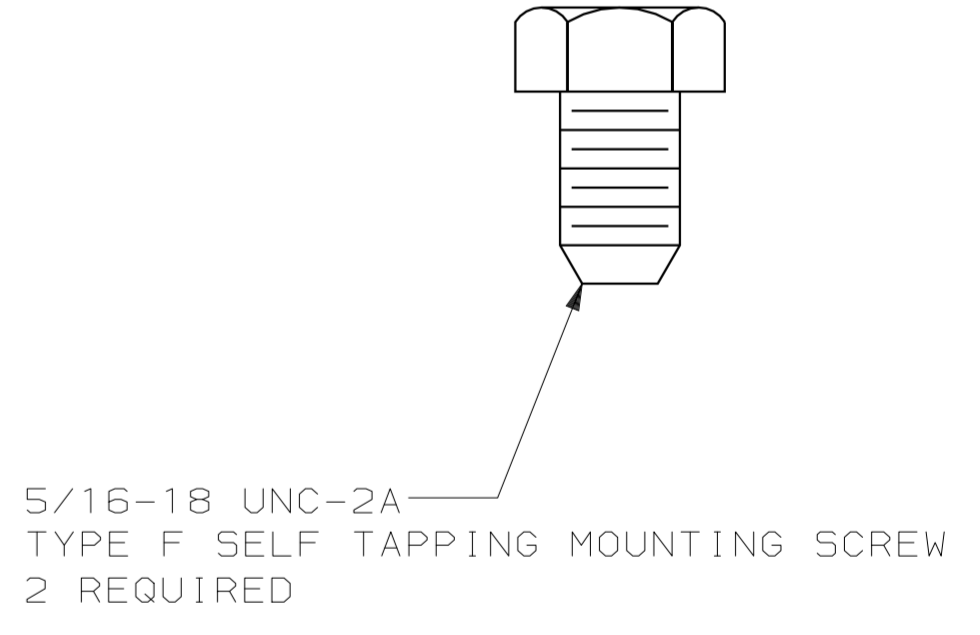

- 1. ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2. DIMENSIONS SHOWN IN BRACKETS [ ] ARE IN MILLIMETERS.
- 3. MATERIAL: JUNCTION BOX HOUSING - POLYCARBONATE, 94V-0, BLACK. BASE & BRACKET - CARBON STEEL, ZINC PLATED .32 OZ PER SQUARE FOOT MINIMUM THICKNESS. JUNCTION BOX TERMINALS - COPPER ALLOY SELECTIVE TIN PLATED  $\mu$ .000200 [5.08 m] MINIMUM THICK AND SELECTIVE SILVER PLATED .000200 [5.08 m] MINIMUM THICK. SCREWS AND NUTS - ZINC PLATED CARBON STEEL. HOLD DOWN TAPE - .030 THICK FOAM TAPE WITH ADHESIVE BOTH SIDES.
- 4. THIS KIT SHOWN ASSEMBLED BUT IS SHIPPED LOOSE.
- 5. KEYING FEATURE FOR POSITIVE MATING.
- 6. POSITIVE LATCHING TO POWER CONNECTOR.
- 7. 125/250V, 20A RATING FOR  $\Phi$ .
- 8. THIS DRAWING SHOWS A JUNCTION BOX ASSEMBLY INCLUDED WITH THIS KIT, BUT THE JUNCTION BOX SHALL BE ORDERED SEPARATELY. ONE JUNCTION BOX ASSEMBLY 5-WIRE, PN 556887-1, OR ONE JUNCTION BOX ASSEMBLY 8-WIRE, PN 556888-1, REQUIRED WITH EACH BRACKET/HARDWARE KIT.

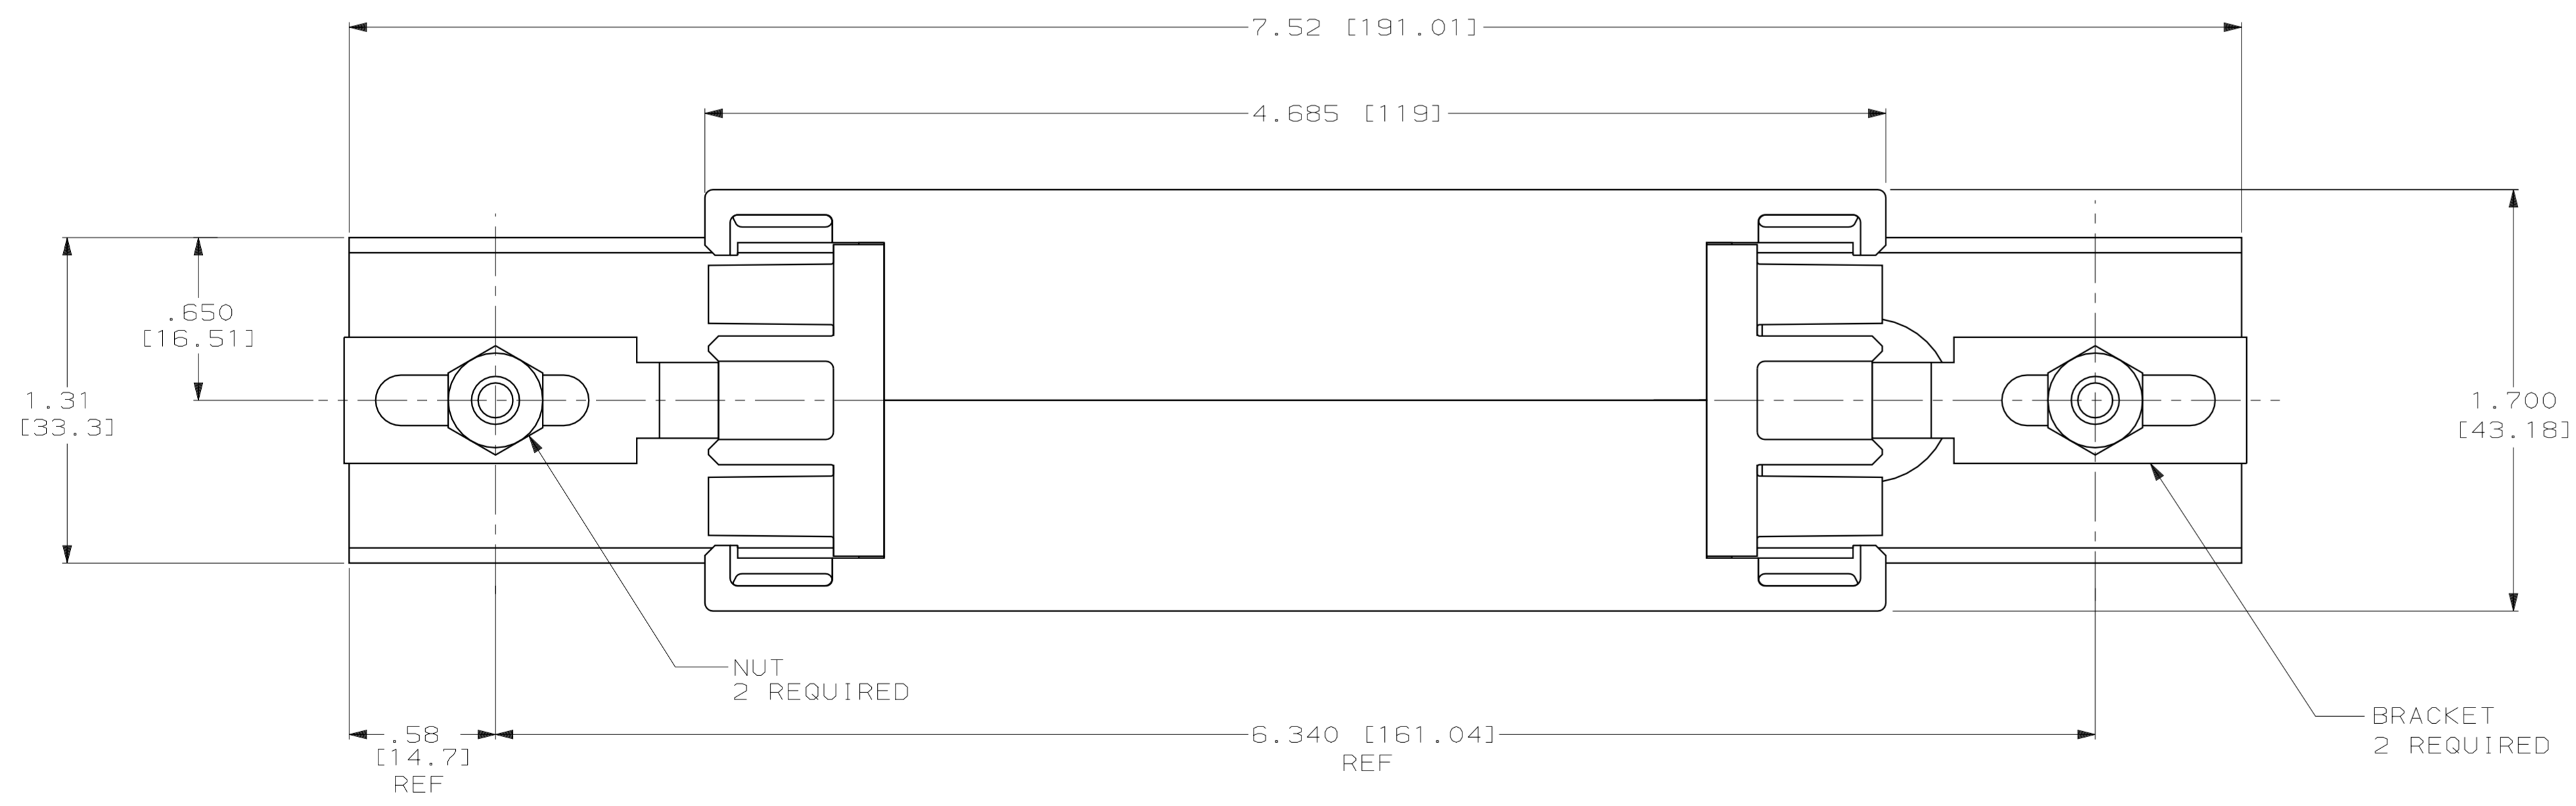

SUGGESTED CUTOUT DIMENSIONS FOR STEELCASE 9000 TRIM BASE  
 SCALE 1:1

**CAD DRAWINGS**  
 THIS DRAWING WAS CREATED ON A COMPUTER AIDED DESIGN (CAD) SYSTEM. TO INSURE THE INTEGRITY OF THE DATA BASE ALL CHANGES/REVISIONS MUST BE MADE ON THE CAD SYSTEM.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm]		DR 1-24-91 VIC SLACK		556920-1 PART NO	
TOLERANCES ON:		CHK		AMP Incorporated Harrisburg, PA 17105-3608	
2 PLC DEC ± $\Delta$ 1		APPD		NAME	
3 PLC DEC ± $\Delta$ 1		APPD		HARDWARE KIT, UNIVERSAL RACEWAY MOUNT	
ANGLES ± $\Delta$ 1		PRODUCT SPEC		SIZE	
MATERIAL		-		D 00779	
FINISH		APPLICATION SPEC		CAGE CODE	
-		-		00779	
WEIGHT		-		DRAWING NO	
-		-		556920	
SCALE		2:1		SHEET	
-		-		1 OF 1	