CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

PART NUMBER	CURRENT RATING (A)	BODY COLOR	RATED VOLTAGE
0283020.MXJ	20	LIGHT BLUE	32V
0283030.MXJ	30	PINK	32V
0283040.MXJ	40	GREEN	32V
0283050.MXJ	50	RED	32V
0283060.MXJ	60	YELLOW	32V
0283070.MXJ	70	BROWN	32V
0283080.MXJ	80	BLACK	32V
0283100.MXJ	100	BLUE	32V
0283120.MXJ	120	WHITE	32V
0283140.MXJ	140	REDDISH BROWN	32V

% OF RATED CURRENT	OPENING TIME	
	MIN	MAX
110%	14,400 SEC.	-
200%	5 SEC.	100 SEC.
350%	0.2 SEC.	7 SEC.
600%	0.04 SEC.	1 SEC.

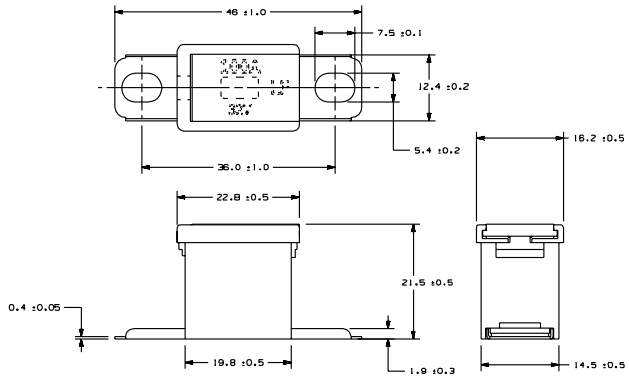

METRIC

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN BRACKETS [ ] ARE INCHES
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

CPK	DENOTES CRITICAL CHARACTERISTICS.
ST	DENOTES CPK DIMENSIONS. MINIMUM CPK VALUE DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
CP	DENOTES CP DIMENSIONS. MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
		BILL OF MATERIAL		

MATL SPEC

COPIES TO	
1 9	18
2 10	19
3 12	20
4 13	21
5 14	23
6 15	33
7 16	43
8 17	53

FINISH

DRW	GMB	DATE 08/14/09	SCALE 2:1
CHK		DATE	SUPER DR
APPD		DATE	FINISH GOOD WT GRAMS/PIECE

TOLERANCE UNLESS OTHERWISE SPECIFIED
ONE PLACE DEC +/-.4 THREE PLACE DEC +/-.100
TWO PLACE DEC +/-.25 ANGULAR +/-1°

TITLE FUSE - PAL 283 ATIS 32V SLOW BLOW

REVISION A DWG. NO. OUTLINE OL-0283000.MXJ

Littelfuse DES PLAINES, ILLINOIS 60016

LTR	DATE	REVISION	CHK	APD
A	08/14/09	000782ER-RELEASE GMB		
B	03/29/10	GA201-RELEASE 0283020.MXJ & 0283140.MXJ GMB		