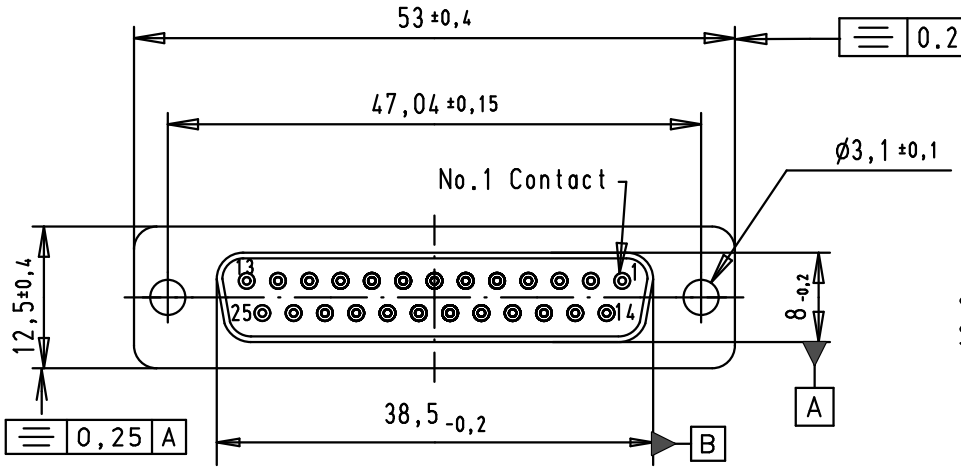

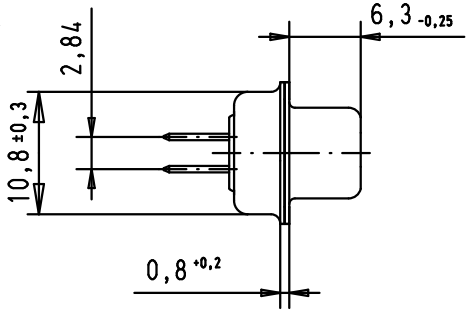

SPECIFICATION

Performance level	PL2
Filter type	C
Capacitance	1000pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

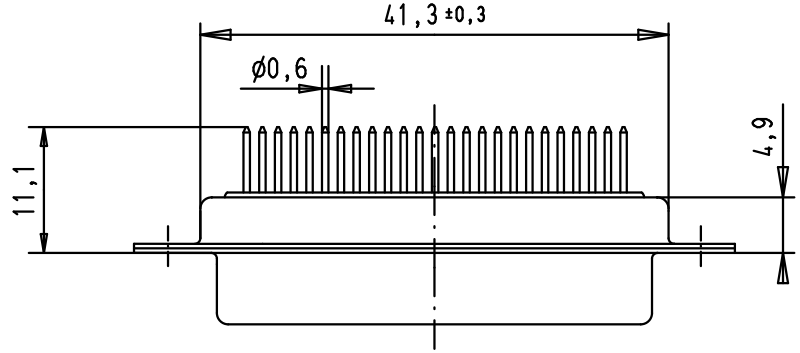

PCB Layout
Component side

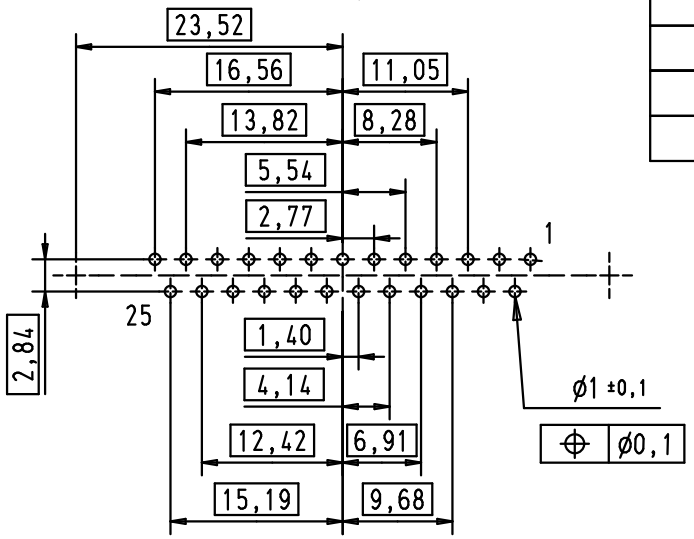

				Dat.	Name
			Detail.	8-JUL-02	CV
36283	09/12/11	SD	Insp.	09/12/11	JB
33274	30/11/05	JMDR	Stand.		
32234	05/10/04	TR			
31058	8-JUL-02	CV			
Mod.	Dat.	Name			

All Dim. in mm
Orig. Size DIN A 4

D-Sub, female, straight, 25 Poles, turned solder pins, fixing holes

Ma?Mstab/ Scale 1.5:1

HARTING EURL
F-95972 Paris

TB 09643127230

Sub.

Blatt/ Page 1/1