


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00112	Connector, dc plug, 3.5x1.35xL18.5 mm, brass nickel plated	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
3	24-00050	Overmold, PVC, black	1	

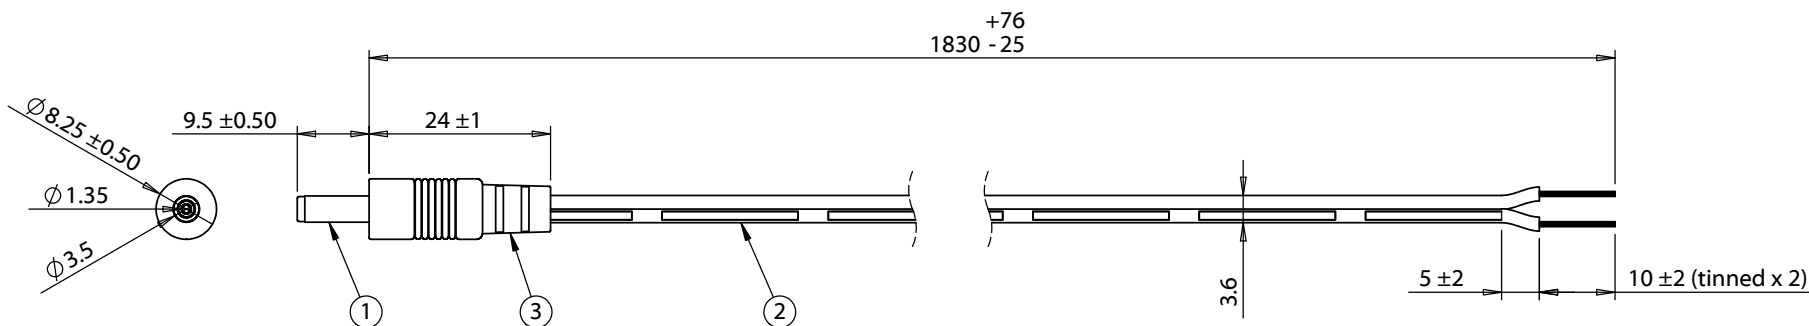

Notes:

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Wiring Diagram	
50-00112	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>				
A	1/19/2009	Re-issue CUI spec as Tensility		RoHS and REACH compliant					
A1	1/19/2011	Added overmold dimensions, and updated description	Verified:	Function test: no open, no short circuit, no intermittent					
A2	8/31/2011	Updated description, connector, and wire information	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 3.5x1.35x9.5 mm, 50-00112 dc plug to stripped tinned, 24 AWG, 30-00003 wire					
A3	10/9/2013	Changed connector to 50-00112			<table border="1"> <tr> <td>Size:</td> <td>Part number:</td> </tr> <tr> <td>A</td> <td>053-0192R (CA-2193)</td> </tr> </table>	Size:	Part number:	A	053-0192R (CA-2193)
Size:	Part number:								
A	053-0192R (CA-2193)								
					<table border="1"> <tr> <td>Scale: 1:1</td> <td></td> <td>Sheet 1 of 1</td> </tr> </table>	Scale: 1:1		Sheet 1 of 1	
Scale: 1:1		Sheet 1 of 1							