


Extended length is with 500g of force

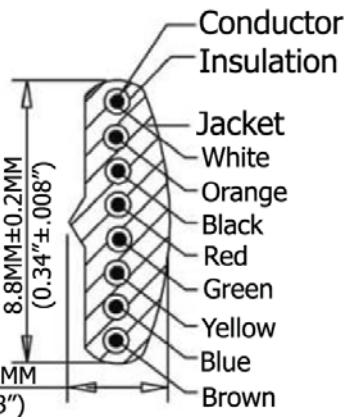

P1	P2
1	WHITE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BLUE
8	BROWN

Extended Length ("L2")	Typical Retracted Length ("L1")
84.0 Inches - 96.6 Inches	39.5 Inches
2,133.6MM-2,453.64MM	1,003.3MM

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X8C): 26AWG (0.12X12) Bare Copper
- Insulation(X8C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

Electrical:

- Voltage rating: 30V (DC)



Scale	1:1					Name	Item No.
TOLERANCE					Drawn	11.02.11	AT-C-26-8/8/B-7/R
X.X	±0.40				Approved	Chappell	
X.XX	±0.25						Title
X.XXX	±0.15						NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM, Reverse Plug, 50µ" of contact plating, BLACK
Angle	±3°						Drawing No.
							rev00
							Replace
							Sheet
		Modification	Date	Name			