



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.



REV.	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	03/01/07	
A1	Add wiring color	16/JAN/2012	

4 3 2 1

4-40thread(UNC)
4X THUMBSCREW
LENGTH






Amphenol Cables on Demand

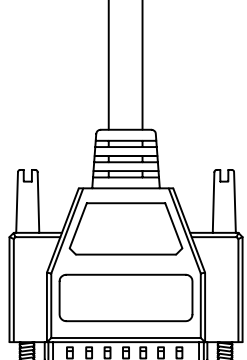

D-SUB
62PIN Male

D-SUB
62PIN Male

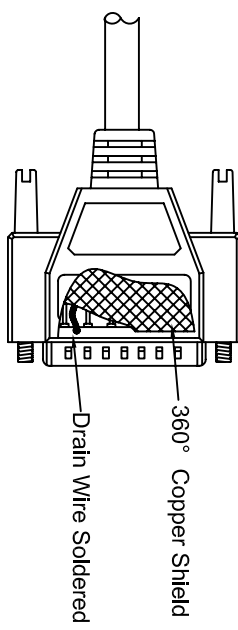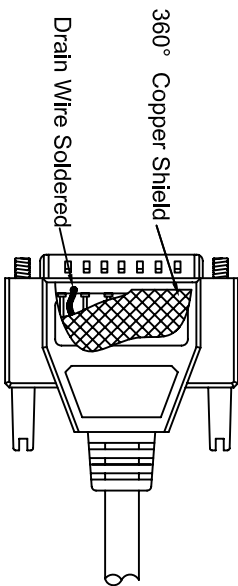

SEC A-A

LENGTH & P/N Table

LENGTH	P/N	Cable Color
2.5FT ± 1 inch	CS-DSDHD62MM0-002.5	GREY
5FT ± 2 inch	CS-DSDHD62MM0-005	GREY
10FT ± 3 inch	CS-DSDHD62MM0-010	GREY
15FT ± 3 inch	CS-DSDHD62MM0-015	GREY
25FT ± 4 inch	CS-DSDHD62MM0-025	GREY
50FT ± 8 inch	CS-DSDHD62MM0-050	GREY

PIN OUT: 1 TO 1

Male	Male	Inner Layer Code	Male	Male	Outer Layer Code	Male	Male	Outer Layer Code	Male	Male	Outer Layer Code
PIN1	PIN1	Black	PIN20	PIN20	Black	PIN42	PIN42	Green/Black	PIN56	PIN56	Blue/Black
PIN2	PIN2	Brown	PIN21	PIN21	Brown	PIN43	PIN43	Grey/Black	PIN57	PIN57	Light Green/Black
PIN3	PIN3	Red	PIN22	PIN22	Red	PIN44	PIN44	Pink/Black	PIN58	PIN58	Light Green/Red
PIN4	PIN4	Orange	PIN23	PIN23	Orange	PIN45	PIN45	Pink/Red	PIN59	PIN59	Light Green/Blue
PIN5	PIN5	Yellow	PIN24	PIN24	Yellow	PIN46	PIN46	Pink/Blue	PIN60	PIN60	Light Green/White
PIN6	PIN6	Green	PIN25	PIN25	Green	PIN47	PIN47	Pink/Green	PIN61	PIN61	Light Yellow/Black
PIN7	PIN7	Blue	PIN26	PIN26	Blue	PIN48	PIN48	Light Blue	PIN62	PIN62	Shield
PIN8	PIN8	Purple	PIN27	PIN27	Purple	PIN49	PIN49	Light Blue/Black			
PIN9	PIN9	Grey	PIN28	PIN28	Grey	PIN50	PIN50	Light Blue/Red			
PIN10	PIN10	White	PIN29	PIN29	White	PIN51	PIN51	Light Blue/Blue			
PIN11	PIN11	Pink	PIN30	PIN30	Pink	PIN52	PIN52	Light Blue/Green			
PIN12	PIN12	Light Green	PIN31	PIN31	Light Green	PIN53	PIN53	Light Blue/White			
PIN13	PIN13	Black/White	PIN32	PIN32	Black/White	PIN54	PIN54	Grey/Red			
PIN14	PIN14	Brown/White	PIN33	PIN33	Brown/White	PIN55	PIN55	Grey/Green			
PIN15	PIN15	Red/White	PIN34	PIN34	Red/White	PIN56	PIN56	Purple/Black			
PIN16	PIN16	Orange/White	PIN35	PIN35	Orange/White	PIN57	PIN57	Blue/Black			
PIN17	PIN17	Green/White	PIN36	PIN36	Green/White	PIN58	PIN58	Light Green/Black			
PIN18	PIN18	Blue/White	PIN37	PIN37	Blue/White	PIN59	PIN59	Light Green/Red			
PIN19	PIN19	Purple/White	PIN38	PIN38	Purple/White	PIN60	PIN60	Light Green/Blue			
			PIN39	PIN39	Red/Black	PIN61	PIN61	Light Yellow/Black			
			PIN40	PIN40	Yellow/Black	PIN62	PIN62	Shield			
			PIN41	PIN41	Yellow/Black						



NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		TOLERANCES ARE:		ANGLES	
DECIMALS	±.X	±.XX	±.XXX	±X°	
XXX	±.XXX				

THIRD ANGLE PROJECTION

EAR NO.	APPROVALS	DATE	Amphenol Cables on Demand
	LF	16/JAN/2012	20 VALLEY ST. ENDCOTT, NY 13760
CHECKED	BA	16/JAN/2012	ASIM CBL Deluxe High Density 62PIN D-Sub MM
RESP ENG			

SIZE	DWG. NO.	SCALE	SHEET	OF
A	CS-DSDHD62MM0-XXXX			
REV.	A1			