

NOTES:


1. RoHS COMPLIANT
2. SUITABLE FOR WAVESOLDERING
3. METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
4. INSULATORS: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
5. CONTACTS: COPPER ALLOY
PLATING: 8µm HARD GOLD over min. 50µm NICKEL
CONTACT TAILS PRETINNED
6. METAL BRACKET: ZINC DIE CAST; 300µm COPPER/40-120µm NICKEL/120-200µm TIN
7. THREADED INSERT: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
8. CAPACITANCE: 2 x 370pF ± 20%
9. DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
10. P.C.B. HOLE DRILLINGS ON SHEET 2
11. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
12. CONNECTOR IS PART MARKED: 241A26090X CONEC ABC

Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH			
DO NOT ALTER CAD DRAWING BY HAND			
finish:	SEE NOTES	tolerance	dim. in mm
date	name	drawn	12.02.07 Letzmenkühler
date	name	appd.	13.02.07 Mickenbecker
norm	DIN 41652		
d-old			
a	Origin	CONEC	
rev.	description	date	name

scale:	2:1 (5:1)		
material:	SEE NOTES		
title:	D-SUB π Filter Male 90° 15pos. 0,590inch threaded insert and metal bracket		
dwg no:	Inventor 10	DIN-A3	
	24K1A974	sh: 1	
part no:	241A26090X		

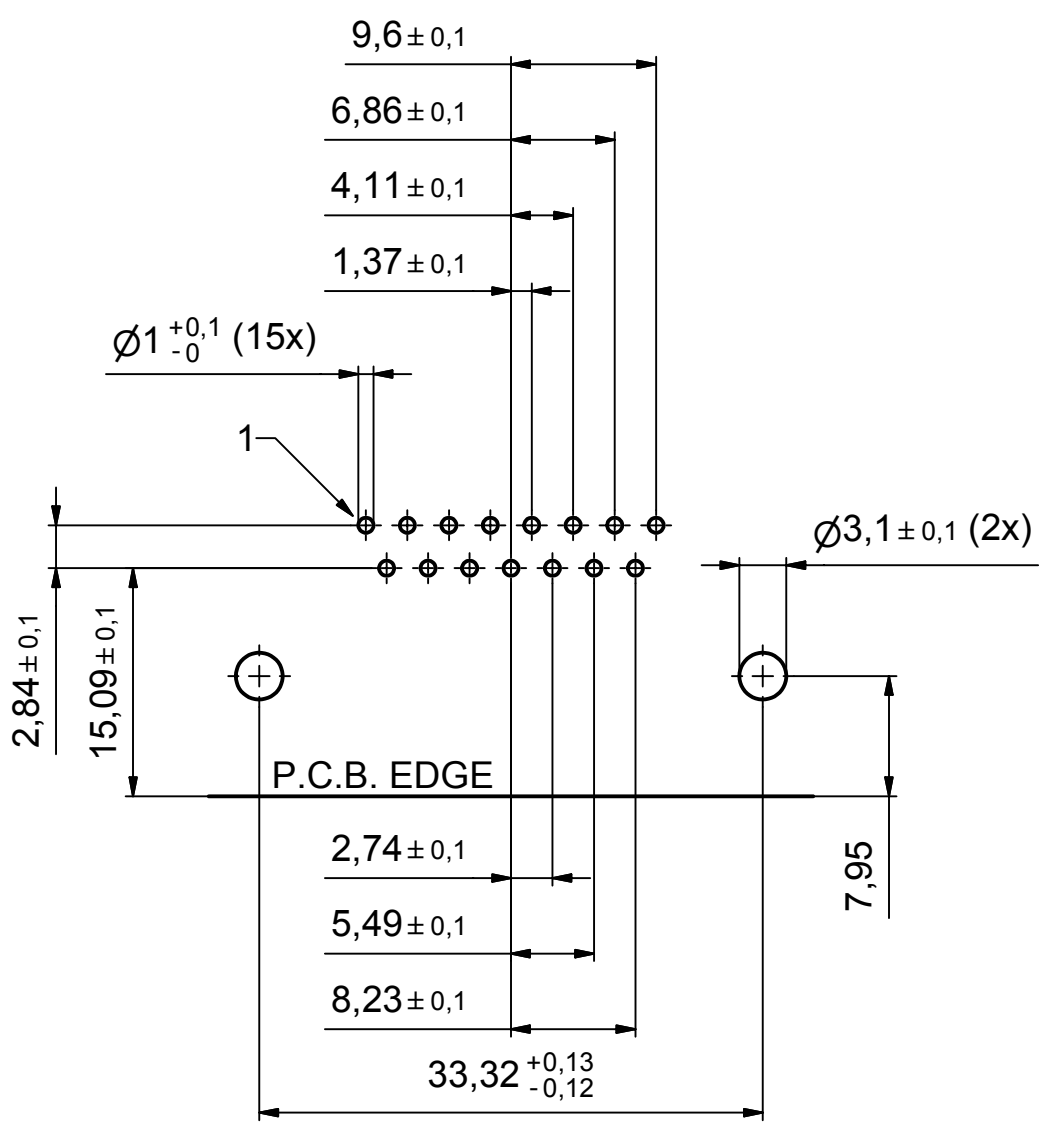

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
 OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

finish: SEE SHEET 1				tolerance		 dim. in mm		scale: 2:1	
				date		name		material: SEE SHEET 1	
				drawn 12.02.07		Lehmenkühler		title: P.C.B. HOLE DRILLINGS D-SUB π Filter Male 90° 15pos., 0,590inch threaded insert and metal bracket	
				appd. 13.02.07		Mickenbecker			
				norm		DIN 41652			
				d-old				dwg no: Inventor 10	
a Origin						24K1A974		DIN-A4	
rev. description date name						part no: SEE SHEET 1		sh: 2	

				date		name		title:	
				drawn 12.02.07		Lehmenkühler		P.C.B. HOLE DRILLINGS D-SUB π Filter Male 90° 15pos., 0,590inch threaded insert and metal bracket	
				appd. 13.02.07		Mickenbecker			
				norm		DIN 41652			
				d-old				dwg no: Inventor 10	
a Origin						24K1A974		DIN-A4	
rev. description date name						part no: SEE SHEET 1		sh: 2	

				date		name		title:	
				drawn 12.02.07		Lehmenkühler		P.C.B. HOLE DRILLINGS D-SUB π Filter Male 90° 15pos., 0,590inch threaded insert and metal bracket	
				appd. 13.02.07		Mickenbecker			
				norm		DIN 41652			
				d-old				dwg no: Inventor 10	
a Origin						24K1A974		DIN-A4	
rev. description date name						part no: SEE SHEET 1		sh: 2	