


12V/24V Power Supply

Specified for use with all Storm AXS access control products this robust, steel encased, switch mode power supply is rated for continuous high performance applications.

The Storm AXS power supply includes an integrated battery charger with intelligent battery state monitoring.

This power supply is designed specifically for use in access control and building security applications. (Please note: Battery not included).

The supply includes two power outputs. One provides continuous power for system use. The second is configurable for either 'fail safe' or 'fail secure' operation in response to activation of a fire alarm system.

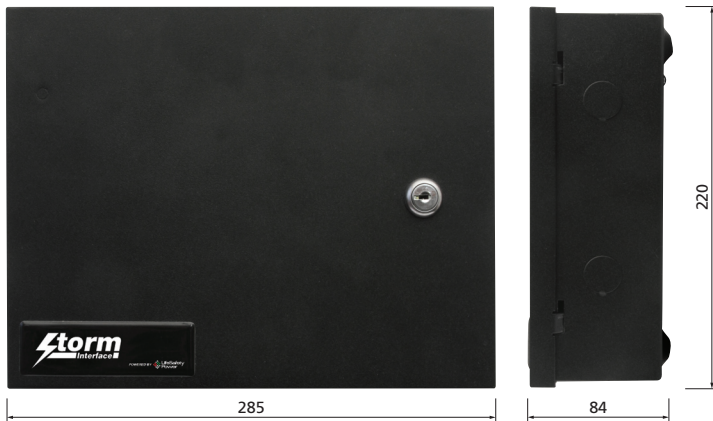

All dimensions in mm

- 12V/6A or 24V/3A output
- 120/230V AC input
- Integral fire alarm interface
- Integral battery condition monitoring
- Data link connection
- Enhanced output noise immunity
- Dual DC outputs (continuous and re-settable)
- 2 Year limited warranty
- Designed to meet UL294/cUL/CE



For more information & to order:

www.storm-interface.com

Specified for use with Storm AXS Access Control Solutions

Storm-AXS StrikeMaster keypads
 Storm-AXS Electro-magnetic door locks
 Storm-AXS Touch-free exit switch
 Storm-AXS Emergency override switch (break glass)

Part Numbers

DR2KW20, DR2KT20, DE1KT10
 DEL600, DEL1200, DEG1200
 DEEX010
 DEEM010



Whilst every effort is made to ensure details are correct at time of print, specifications are subject to change without notice.

Designed & produced by NIK Design
 nik@nikdesign.co.uk

Storm Interface products include technology protected by international patents and design registration. All rights reserved.



Storm is a trademark of Keymat Technology Ltd
 Storm Interface is a trading name of Keymat Technology Ltd

DEPS030 July 2014



FM 39602

