

**Isolierkörpermaterial**

Nylon 9T, UL94V-0

**Kontaktmaterial**

Phosphorbronze

**Kontaktoberfläche**

Ni, Sn

**Kontaktwiderstand**

15mΩ max

**Isolationswiderstand**

10000MΩ min

**Strombelastbarkeit**

1A

**Betriebstemperatur**

-40°C - +105°C

**Betriebsspannung**

100V AC

**Prüfspannung**

500V AC

**Verpackung**

Stangenverpackung

**Insulator material**

Nylon 9T, UL94V-0

**Contact material**

Phosphor bronze

**Plating**

Ni, Sn

**Contact resistance**

15mΩ max

**Insulation resistance**

10000MΩ min

**Current rating**

1A

**Operating temperature**

-40°C - +105°C

**Operating voltage**

100V AC

**Test voltage**




500V AC

**Packing**

Tube packing

**Dimensions**

No. of contacts	A	B	C	D	E	F
20	15.34	15.34	5.08	5.08	10.03	10.03
28	17.85	17.85	7.62	7.62	12.57	12.57
32	17.85	20.42	7.62	10.16	12.57	15.11
44	23.07	23.07	12.70	12.70	17.65	17.65
52	25.50	25.50	15.24	15.24	20.19	20.19
68	31.00	31.00	20.32	20.32	25.27	25.27
84	36.10	36.10	25.40	25.40	30.35	30.35

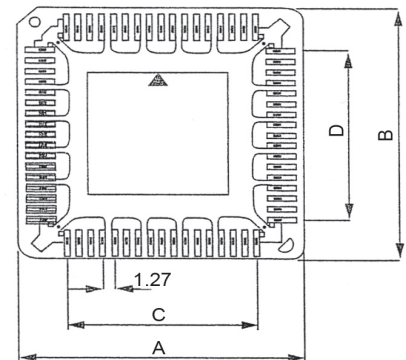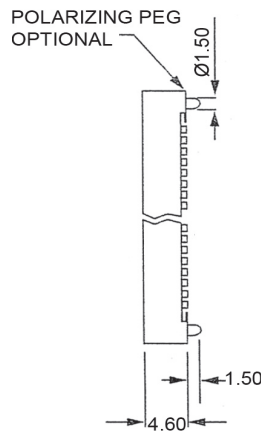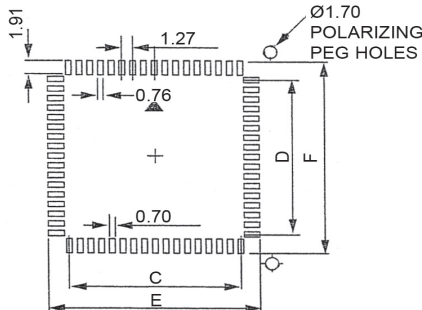

Bestellcode / Ordercode

**Polzahl**

20 / 28 / 32 / 44 / 52 / 68 / 84

**No. of contacts**

20 / 28 / 32 / 44 / 52 / 68 / 84

**Ausführung**

SM - ohne Polarisierung  
 SM/P - mit Polarisierung

**Version**

SM - without polarizing peg  
 SM/P - with polarizing peg

**A - CCS 0 xx - Z - x**

Bitte „x“ durch die geeignete Option ersetzen  
 Please replace „x“ appropriate option

- Cable assemblies
- D-Sub / Hoods Centronics
- Multiflex - DIN41651
- Modular
- USB IEEE1394
- Switches
- Powercords Powerlets
- DIN41612 Handmetric
- MiniDIN
- Sockets / Strips Jumper
- Terminal Blocks
- Memory Card
- FFC / FPC