


FCI P/N	C P/N	L/mm
10121798-P0011YYLF	A5E31328447	105

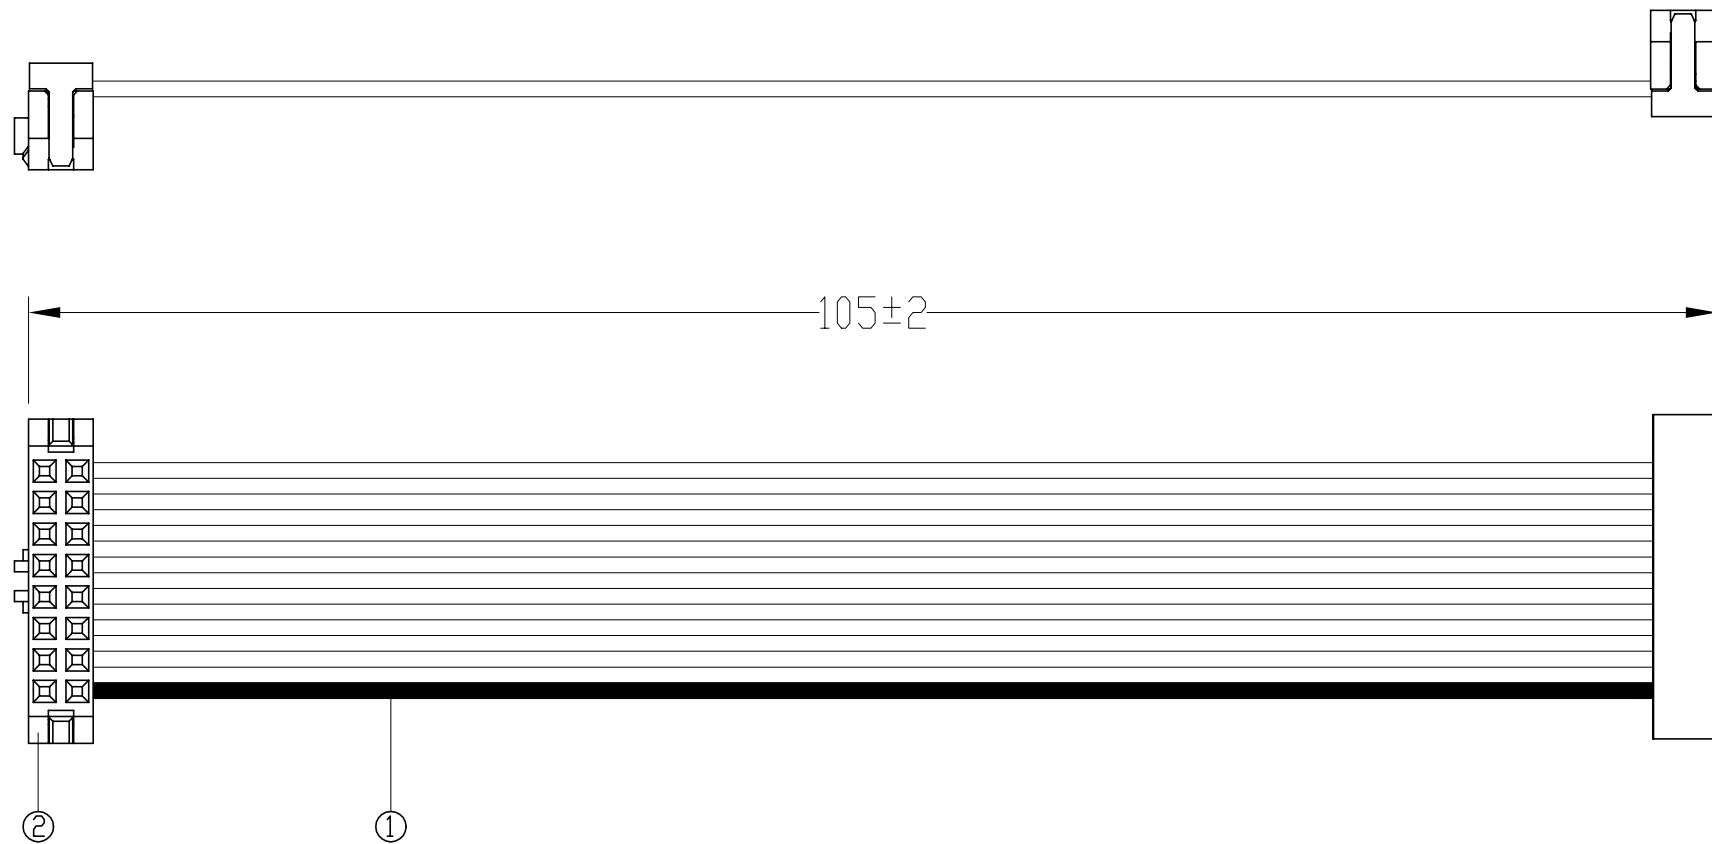

P1

P2

105±2

②

①

NOTES:

1. TEST:

□/S:100% TEST.  
 CONNECTION RESISTANCE: 3 ΩHM MAX.  
 HI-POT:300V/10mS.  
 INSULATION RESISTANCE: 10 MOHM MIN.

2. ROHS COMPLIANCE

②	IDC CONN.	Minitex 2x8 position IDC receptacle, 0.76um gold, with central key and friction latch bump	2	PC
①	RIBBON CABLE	UL2651, 28AWGx16C, Pitch1.0, Grey PVC,	A/R	M
No.	NAME	DESCRIPTION	QTY	UNIT
www.fciconnect.com		surface - ✓ tolerance std - - projection	mm	
		TOLERANCES UNLESS OTHERWISE SPECIFIED		
Dr	Tom Feng	2012-11-16	ANGULAR	LINEAR
Eng	Tom Feng	2012-11-16	0.X	±-
Chr	Roger Cheng	2012-11-16	0.XX	±-
Appr	Jackson Wang	2012-11-16	0.XXX	±-
Product family		size A3		Scale 2:3
Spec ref		ECN		-
		title Minitex IDC Cable Ass'y	dwg no 10121798	Rev. A
catalog no -		CUSTOMER	sheet 1 of 1	

rev	ecn no	dr	date
A	-	TF	2012-11-16

Copyright FCI.